


# LED FLOOD LIGHT

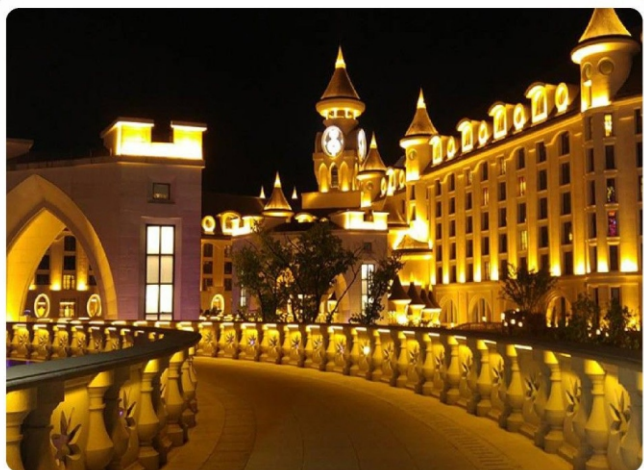

## ■ Product Features

- Fully sealed, waterproof design utilizing silicone sealing materials.
- Ensures an ingress protection rating of IP65 or higher.
- High luminous efficacy and high color rendering index (CRI).
- High-transmittance PMMA optical lens with a beam uniformity greater than 0.92.

### LM-LH-FL-2001

Voltage: DC24V/AC100~265V  
 Power: 3\*3W/6\*1W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ100\*110\*H160mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-2001

Voltage: DC24V/AC100~265V  
 Power: 6\*3W/9\*2W/12\*1W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ130\*130\*H180mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-2001

Voltage: DC24V/AC100~265V  
 Power: 12\*2W/18\*2W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ160\*160\*H200mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-2001

Voltage: DC24V/AC100~265V  
 Power: 24\*2W/36\*1.5W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ190\*175\*H230mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-2001

Voltage: DC24V/AC100~265V  
 Power: 36\*2W/48\*1.5W/54\*1W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ230\*205\*H260mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-2001

Voltage: DC24V/AC100~265V  
 Power: 54\*2W/72\*2W/100\*1W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ290\*255\*H425mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512



### LM-LH-FL-2001

Voltage: DC24V/AC100~265V  
 Power: 100\*2W/120\*2W/150\*1W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ360\*180\*H460mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-2001

Voltage: DC24V/AC100~265V  
 Power: 3\*3W/6\*1W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ100\*140\*H180mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-2001

Voltage: DC24V/AC100~265V  
 Power: 6\*3W/9\*2W/12\*1W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ130\*175\*H200mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-2001

Voltage: DC24V/AC100~265V  
 Power: 12\*2W/18\*2W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ160\*210\*H230mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-2001

Voltage: DC24V/AC100~265V  
 Power: 24\*2W/36\*1.5W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ190\*240\*H290mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-2001


Voltage: DC24V/AC100~265V  
 Power: 36\*2W/48\*1.5W/54\*1W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ230\*280\*H330mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-2001

Voltage: DC24V/AC100~265V  
 Power: 54\*2W/72\*2W/100\*1W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ290\*380\*H460mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-2001

Voltage: DC24V/AC100~265V  
 Power: 100\*2W/120\*2W/150\*1W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ360\*320\*H500mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

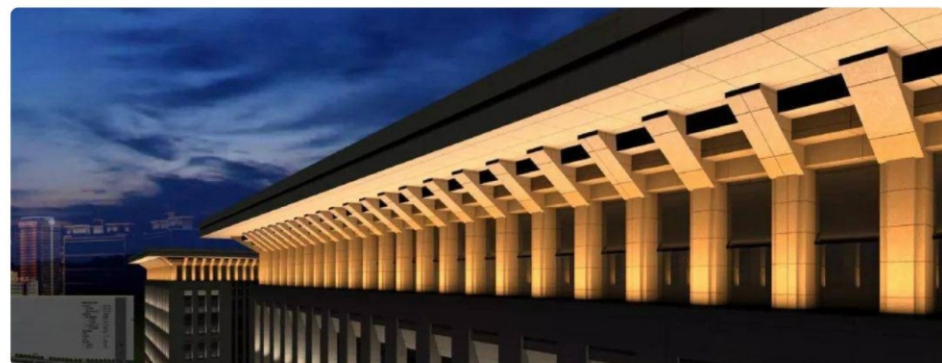

### LM-LH-FL-2002

Voltage: DC24V/AC100~265V  
 Power: 6W/3\*3W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ110\*110\*H150mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-2002

Voltage: DC24V/AC100~265V  
 Power: 12W/9\*2W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ135\*115\*H180mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-2002

Voltage: DC24V/AC100~265V  
 Power: 24W/18\*2W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ170\*130\*H230mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512



### LM-LH-FL-2002

Voltage: DC24V/AC100~265V  
 Power : 36W/24\*2W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ200\*135\*H260mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-2002

Voltage: DC24V/AC100~265V  
 Power : 48W/54W/36\*2W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ235\*140\*H290mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-2002

Voltage: DC24V/AC100~265V  
 Power : 100W/54\*2W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ285\*170\*H330mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-2002

Voltage: DC24V/AC100~265V  
 Power : 6W/3\*3W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ110\*140\*H150mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-2002

Voltage: DC24V/AC100~265V  
 Power : 12W/9\*2W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ135\*170\*H180mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-2002

Voltage: DC24V/AC100~265V  
 Power : 24W/18\*2W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ170\*190\*H230mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-2002

Voltage: DC24V/AC100~265V  
 Power : 36W/24\*2W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ200\*210\*H260mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-2002

Voltage: DC24V/AC100~265V  
 Power : 48W/54W/36\*2W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ230\*215\*H290mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-2002

Voltage: DC24V/AC100~265V  
 Power : 100W/54\*2W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ285\*250\*H330mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-2003

Voltage: DC24V/AC100~265V  
 Power : 12W/9\*2W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ150\*140\*H205mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-2003

Voltage: DC24V/AC100~265V  
 Power : 24W/18\*2W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ190\*180\*H260mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-2003

Voltage: DC24V/AC100~265V  
 Power : 36W/24\*2W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ210\*185\*H290mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512



### LM-LH-FL-2003

Voltage: DC24V/AC100~265V  
 Power: 60W/60\*1.5W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size:  $\Phi 250 \times 200 \times H330$ mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-2003

Voltage: DC24V/AC100~265V  
 Power: 120W/120\*1.5W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size:  $\Phi 320 \times 230 \times H410$ mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-2003

Voltage: DC24V/AC100~265V  
 Power: 12W/9\*2W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size:  $\Phi 150 \times 190 \times H205$ mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-2003


Voltage: DC24V/AC100~265V  
 Power: 24W/18\*2W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size:  $\Phi 190 \times 240 \times H260$ mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-2003

Voltage: DC24V/AC100~265V  
 Power: 36W/24\*2W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size:  $\Phi 210 \times 260 \times H290$ mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-2003

Voltage: DC24V/AC100~265V  
 Power: 60W/60\*1.5W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size:  $\Phi 250 \times 290 \times H330$ mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

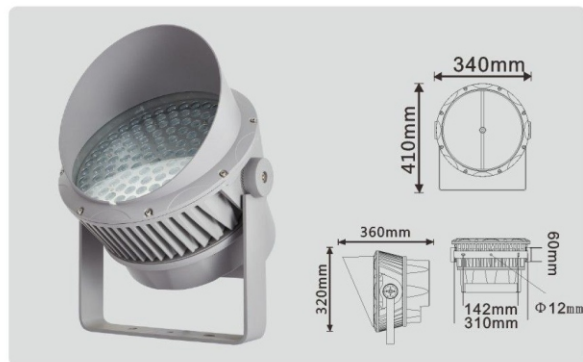

### LM-LH-FL-2003

Voltage: DC24V/AC100~265V  
 Power: 120W/120\*1.5W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ320\*360\*H410mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512



### LM-LH-FL-2004

Voltage: DC24V/AC100~265V  
 Power: 6W/3\*3W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ105\*90\*H130mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512



### LM-LH-FL-2004

Voltage: DC24V/AC100~265V  
 Power: 6\*2W/9\*1.5W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ130\*95\*H170mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512




### LM-LH-FL-2004

Voltage: DC24V/AC100~265V  
 Power: 24W/18\*1.5W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ170\*165\*H205mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512



### LM-LH-FL-2004

Voltage: DC24V/AC100~265V  
 Power: 36W/24\*1.5W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ200\*110\*H240mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

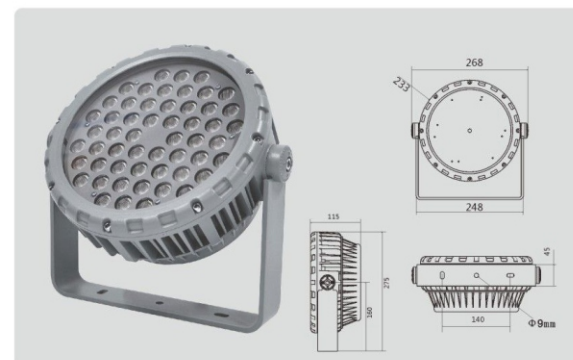

### LM-LH-FL-2004

Voltage: DC24V/AC100~265V  
 Power: 48W/54W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ230\*220\*H260mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512



### LM-LH-FL-2004

Voltage: DC24V/AC100~265V  
 Power : 72W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ260\*250\*H330mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-2004

Voltage: DC24V/AC100~265V  
 Power : 6\*2W/3\*3W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ105\*190\*H130mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-2004

Voltage: DC24V/AC100~265V  
 Power : 6\*2W/9\*1.5W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ130\*145\*H170mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-2004

Voltage: DC24V/AC100~265V  
 Power : 24W/18\*1.5W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ170\*165\*H205mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-2004

Voltage: DC24V/AC100~265V  
 Power : 36W/24\*1.5W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ200\*180\*H240mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-2004

Voltage: DC24V/AC100~265V  
 Power : 48W/54W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ230\*220\*H260mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-2003

Voltage: DC24V/AC100~265V  
 Power : 72W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ260\*250\*H330mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-2008

Voltage: DC24V/AC100~265V  
 Power : 24W/18\*2W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ176\*134\*H207mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-2008

Voltage: DC24V/AC100~265V  
 Power : 36W/24\*2W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ205\*139\*H233mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-2008

Voltage: DC24V/AC100~265V  
 Power : 48W/54W/36\*2W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ235\*155\*H285mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-2008

Voltage: DC24V/AC100~265V  
 Power : 24W/18\*2W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ178\*189\*H209mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-2008

Voltage: DC24V/AC100~265V  
 Power : 36W/24\*2W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ207\*205\*H235mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-2008

Voltage: DC24V/AC100~265V  
 Power: 48W/54W/36\*2W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ236\*226\*H287mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-13001

Voltage: DC24V/AC100~265V  
 Power: 5\*2W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ95\*90\*H150mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-13001

Voltage: DC24V/AC100~265V  
 Power: 5\*2W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ95\*90\*H160mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-13001

Voltage: DC24V/AC100~265V  
 Power: 12\*1W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ150\*110\*H175mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-13001

Voltage: DC24V/AC100~265V  
 Power: 12\*1W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ150\*110\*H195mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-13001

Voltage: DC24V/AC100~265V  
 Power: 18\*1W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ180\*120\*H220mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512



### LM-LH-FL-13001

Voltage: DC24V/AC100~265V  
 Power : 18\*1W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ180\*165\*H235mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-13001

Voltage: DC24V/AC100~265V  
 Power : 36\*1W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ230\*150\*H285mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-13001

Voltage: DC24V/AC100~265V  
 Power : 36\*1W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ230\*200\*H288mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-13001

Voltage: DC24V/AC100~265V  
 Power : 60\*1W/72\*1W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ290\*230\*H339mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-13001

Voltage: DC24V/AC100~265V  
 Power : 60\*1W/72\*1W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ290\*230\*H339mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-13001

Voltage: DC24V/AC100~265V  
 Power : 120\*1.6W/150\*1.2W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ355\*198\*H310mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-13001

Voltage: DC24V/AC100~265V  
 Power: 120\*1.6W/150\*1.2W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ355\*188\*H310mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-13002

Voltage: DC24V/AC100~265V  
 Power: 5\*1W/6\*1W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ110\*98\*H146mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-13002

Voltage: DC24V/AC100~265V  
 Power: 5\*1W/6\*1W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ110\*98\*H146mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-13002

Voltage: DC24V/AC100~265V  
 Power: 9\*2W/12\*1W/18\*1W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ170\*122\*H215mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-13002

Voltage: DC24V/AC100~265V  
 Power: 9\*2W/12\*1W/18\*1W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ170\*162\*H215mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-13002

Voltage: DC24V/AC100~265V  
 Power: 18\*1W/24\*1W/36\*1W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ206\*145\*H245mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-13002


Voltage: DC24V/AC100~265V  
 Power: 18\*2W/24\*1W/36\*1W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ206\*185\*H245mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-13002

Voltage: DC24V/AC100~265V  
 Power: 36\*2W/54\*2W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ240\*190\*H310mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-13002

Voltage: DC24V/AC100~265V  
 Power: 36\*2W/54\*2W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ240\*190\*H380mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512


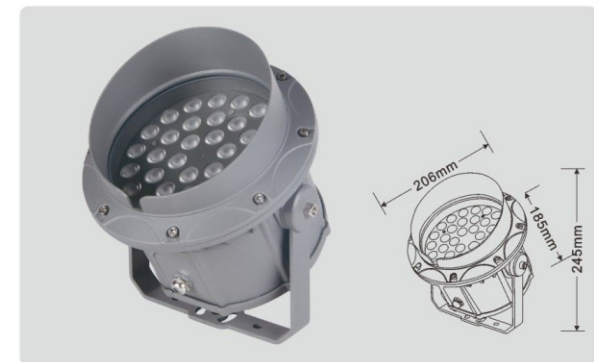


### LM-LH-FL-13002

Voltage: DC24V/AC100~265V  
 Power: 60\*2W/72\*1.5W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ280\*270\*H390mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF

### LM-LH-FL-13002

Voltage: DC24V/AC100~265V  
 Power: 60\*2W/72\*1.5W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ280\*270\*H390mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

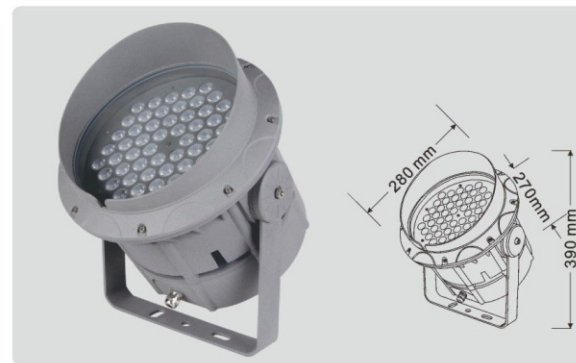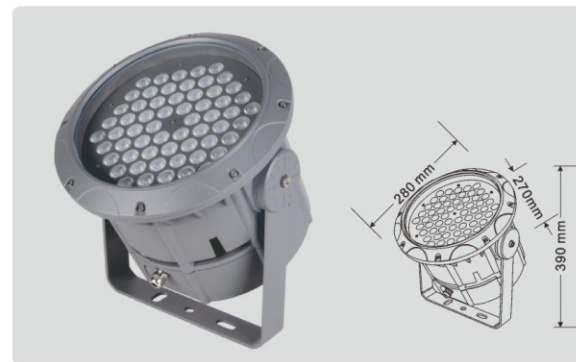



### LM-LH-FL-4001

Voltage: DC24V/AC100~265V  
 Power: 12W/12\*1.5W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ150\*H180mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-4001

Voltage: DC24V/AC100~265V  
 Power: 18W/18\*1.5W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ180\*H230mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-4001

Voltage: DC24V/AC100~265V  
 Power: 24W/24\*1.5W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ205\*H260mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-4001

Voltage: DC24V/AC100~265V  
 Power: 36W/36\*1.5W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ230\*H290mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF

### LM-LH-FL-4001

Voltage: DC24V/AC100~265V  
 Power: 54W/54\*2W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ280\*H330mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-4001

Voltage: DC24V/AC100~265V  
 Power: 12W/12\*1.5W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ150\*H210mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-4001

Voltage: DC24V/AC100~265V  
 Power: 18W/18\*1.5W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ180\*H260mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-4001

Voltage: DC24V/AC100~265V  
 Power: 24W/24\*1.5W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ205\*H290mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-4001

Voltage: DC24V/AC100~265V  
 Power: 36W/36\*1.5W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ230\*H320mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-4001

Voltage: DC24V/AC100~265V  
 Power: 54W/54\*2W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ280\*H360mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF

### LM-LH-FL-4002

Voltage: DC24V/AC100~265V  
 Power: 12W/12\*2W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ160\*H215mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-4002

Voltage: DC24V/AC100~265V  
 Power: 18W/18\*2W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ190\*H255mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-4002

Voltage: DC24V/AC100~265V  
 Power : 24W/24\*3W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ210\*H260mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-4002

Voltage: DC24V/AC100~265V  
 Power : 36W/36\*3W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ235\*H300mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-4002

Voltage: DC24V/AC100~265V  
 Power : 12W/12\*2W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ160\*H265mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-4002

Voltage: DC24V/AC100~265V  
 Power : 18W/18\*2W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ190\*H305mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF

### LM-LH-FL-4002

Voltage: DC24V/AC100~265V  
 Power : 24W/24\*3W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ210\*H310mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-4002

Voltage: DC24V/AC100~265V  
 Power : 36W/36\*3W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ235\*H350mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512



### LM-LH-FL-4003

Voltage: DC24V/AC100~265V  
 Power: 12W/18W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ150\*H210mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-4003

Voltage: DC24V/AC100~265V  
 Power: 18W/36W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ190\*H250mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-4003

Voltage: DC24V/AC100~265V  
 Power: 36W/48W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ230\*H285mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-4003

Voltage: DC24V/AC100~265V  
 Power: 12W/18W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ150\*H240mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF

### LM-LH-FL-4003

Voltage: DC24V/AC100~265V  
 Power: 18W/36W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ190\*H300mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-4003

Voltage: DC24V/AC100~265V  
 Power: 36W/48W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: Φ185\*H340mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-3002

Voltage: DC24V/AC100~265V  
 Power: 6W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size:  $\Phi 108 \times 55$ mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-3002

Voltage: DC24V/AC100~265V  
 Power: 9W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size:  $\Phi 108 \times 55$ mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-3002

Voltage: DC24V/AC100~265V  
 Power: 15W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size:  $\Phi 140 \times 62$ mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-3002

Voltage: DC24V/AC100~265V  
 Power: 18W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size:  $\Phi 180 \times 62$ mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF

### LM-LH-FL-3002

Voltage: DC24V/AC100~265V  
 Power: 24W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size:  $\Phi 180 \times 62$ mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-3002

Voltage: DC24V/AC100~265V  
 Power: 36W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size:  $\Phi 200 \times 65$ mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-3002

Voltage: DC24V/AC100~265V  
 Power: 6W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size:  $\Phi 108 \times 55$ mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-3002

Voltage: DC24V/AC100~265V  
 Power: 9W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size:  $\Phi 108 \times 55$ mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-3002

Voltage: DC24V/AC100~265V  
 Power: 15W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size:  $\Phi 140 \times 62$ mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-3002

Voltage: DC24V/AC100~265V  
 Power: 18W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size:  $\Phi 180 \times 62$ mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF

### LM-LH-FL-3002

Voltage: DC24V/AC100~265V  
 Power: 24W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size:  $\Phi 180 \times 62$ mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-3002

Voltage: DC24V/AC100~265V  
 Power: 36W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size:  $\Phi 200 \times 65$ mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512



### LM-LH-FL-2007

Voltage: DC24V/AC100~265V  
 Power : 3\*2W/4\*3W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: 70\*66\*H103mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-2007

Voltage: DC24V/AC100~265V  
 Power : 6\*2W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: 100\*66\*H103mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-2007

Voltage: DC24V/AC100~265V  
 Power : 6\*2W/9\*2W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: 112\*73\*H153mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-2007

Voltage: DC24V/AC100~265V  
 Power : 18W/12\*2W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: 140\*73\*H192mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF

### LM-LH-FL-2007

Voltage: DC24V/AC100~265V  
 Power : 24W/18\*2W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: 170\*76\*H220mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-2007

Voltage: DC24V/AC100~265V  
 Power : 36W/24\*2W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: 200\*83\*H250mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-2007

Voltage: DC24V/AC100~265V  
 Power : 48W/54W/36\*2W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: 238\*90\*H305mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-2007

Voltage: DC24V/AC100~265V  
 Power : 3\*2W/4\*3W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: 70\*96\*H103mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-2007

Voltage: DC24V/AC100~265V  
 Power : 6\*2W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: 100\*97\*H103mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-2007

Voltage: DC24V/AC100~265V  
 Power : 6\*2W/9\*2W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: 113\*105\*H154mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF

### LM-LH-FL-2007

Voltage: DC24V/AC100~265V  
 Power : 18W/12\*2W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: 141\*110\*H193mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-2007

Voltage: DC24V/AC100~265V  
 Power : 24W/18\*2W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: 172\*140\*H222mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-2007

Voltage: DC24V/AC100~265V  
 Power : 36W/24\*2W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: 202\*140\*H252mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-2007

Voltage: DC24V/AC100~265V  
 Power : 48W/54W/36\*2W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: 240\*157\*H307mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-2007

Voltage: DC24V/AC100~265V  
 Power : 1\*4W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: 70\*66\*H103mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-2007

Voltage: DC24V/AC100~265V  
 Power : 2\*4W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: 100\*66\*H103mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF


### LM-LH-FL-2007

Voltage: DC24V/AC100~265V  
 Power : 4\*4W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: 112\*73\*H153mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-2007


Voltage: DC24V/AC100~265V  
 Power : 5\*4W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: 140\*73\*H192mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512






### LM-LH-FL-2007

Voltage: DC24V/AC100~265V  
Power: 9\*4W  
LED Brand: Bridgelux/Osram/CREE/Philips  
Color: 2200K/2700K/3000K  
4000K/6000K/RGB/RGBW  
Beam angle: 10/15/25/30/45/60°  
Size: 170\*76\*H220mm  
Material: Aluminum + Tempered Glass  
Waterproof rating: IP65  
Control method: ON/OFF DMX512




### LM-LH-FL-2007

Voltage: DC24V/AC100~265V  
Power: 16\*3W  
LED Brand: Bridgelux/Osram/CREE/Philips  
Color: 2200K/2700K/3000K  
4000K/6000K/RGB/RGBW  
Beam angle: 10/15/25/30/45/60°  
Size: 200\*83\*H250mm  
Material: Aluminum + Tempered Glass  
Waterproof rating: IP65  
Control method: ON/OFF DMX512




### LM-LH-FL-2007

Voltage: DC24V/AC100~265V  
Power: 24\*3W  
LED Brand: Bridgelux/Osram/CREE/Philips  
Color: 2200K/2700K/3000K  
4000K/6000K/RGB/RGBW  
Beam angle: 10/15/25/30/45/60°  
Size: 238\*90\*H305mm  
Material: Aluminum + Tempered Glass  
Waterproof rating: IP65  
Control method: ON/OFF DMX512




### LM-LH-FL-2007

Voltage: DC24V/AC100~265V  
Power: 1\*4W  
LED Brand: Bridgelux/Osram/CREE/Philips  
Color: 2200K/2700K/3000K  
4000K/6000K/RGB/RGBW  
Beam angle: 10/15/25/30/45/60°  
Size: 70\*66\*H103mm  
Material: Aluminum + Tempered Glass  
Waterproof rating: IP65  
Control method: ON/OFF



### LM-LH-FL-2007

Voltage: DC24V/AC100~265V  
Power: 2\*4W  
LED Brand: Bridgelux/Osram/CREE/Philips  
Color: 2200K/2700K/3000K  
4000K/6000K/RGB/RGBW  
Beam angle: 10/15/25/30/45/60°  
Size: 100\*70\*H103mm  
Material: Aluminum + Tempered Glass  
Waterproof rating: IP65  
Control method: ON/OFF DMX512



### LM-LH-FL-2007

Voltage: DC24V/AC100~265V  
Power: 4\*4W  
LED Brand: Bridgelux/Osram/CREE/Philips  
Color: 2200K/2700K/3000K  
4000K/6000K/RGB/RGBW  
Beam angle: 10/15/25/30/45/60°  
Size: 113\*73\*H154mm  
Material: Aluminum + Tempered Glass  
Waterproof rating: IP65  
Control method: ON/OFF DMX512

### LM-LH-FL-2007

Voltage: DC24V/AC100~265V  
 Power: 5\*4W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: 141\*73\*H193mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-2007

Voltage: DC24V/AC100~265V  
 Power: 9\*4W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: 170\*76\*H220mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-2007

Voltage: DC24V/AC100~265V  
 Power: 16\*3W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: 200\*83\*H250mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-2007

Voltage: DC24V/AC100~265V  
 Power: 24\*3W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: 240\*90\*H305mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF

### LM-LH-FL-2005

Voltage: DC24V/AC100~265V  
 Power: 9\*3W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: 160\*160\*H195mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-2005

Voltage: DC24V/AC100~265V  
 Power: 24\*1.5W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: 210\*210\*H250mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-2005

Voltage: DC24V/AC100~265V  
 Power : 36\*1.5W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: 260\*260\*H280mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-2005

Voltage: DC24V/AC100~265V  
 Power : 9\*3W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: 160\*160\*H195mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-2005

Voltage: DC24V/AC100~265V  
 Power : 24\*1.5W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: 210\*210\*H250mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-2005

Voltage: DC24V/AC100~265V  
 Power : 36\*1.5W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: 260\*260\*H280mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF

### LM-LH-FL-13003

Voltage: DC24V/AC100~265V  
 Power : 4\*5W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: 96\*96\*H150mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-13003

Voltage: DC24V/AC100~265V  
 Power : 4\*5W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: 96\*96\*H170mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512



### LM-LH-FL-13003

Voltage: DC24V/AC100~265V  
 Power : 5\*5W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: 135\*135\*H215mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-13003

Voltage: DC24V/AC100~265V  
 Power : 5\*5W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: 135\*135\*H230mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-13003

Voltage: DC24V/AC100~265V  
 Power : 9\*5W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: 170\*170\*H260mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-13003

Voltage: DC24V/AC100~265V  
 Power : 9\*5W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: 170\*170\*H280mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF

### LM-LH-FL-13003

Voltage: DC24V/AC100~265V  
 Power : 16\*5W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: 195\*195\*H290mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-13003

Voltage: DC24V/AC100~265V  
 Power : 16\*5W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: 195\*195\*H290mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-13003

Voltage: DC24V/AC100~265V  
 Power : 16\*8W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: 213\*213\*H280mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-13003

Voltage: DC24V/AC100~265V  
 Power : 16\*8W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: 213\*213\*H345mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-13003

Voltage: DC24V/AC100~265V  
 Power : 9\*2W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: 96\*W96\*H150mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-13003

Voltage: DC24V/AC100~265V  
 Power : 9\*2W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: 96\*96\*H170mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF

### LM-LH-FL-13003

Voltage: DC24V/AC100~265V  
 Power : 16\*2W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: 135\*135\*H215mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-13003

Voltage: DC24V/AC100~265V  
 Power : 16\*2W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: 135\*135\*H230mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-13003

Voltage: DC24V/AC100~265V  
 Power : 16\*3W/24\*2W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: 170\*170\*H245mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-13003

Voltage: DC24V/AC100~265V  
 Power : 16\*3W/24\*2W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: 170\*170\*H260mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-13003

Voltage: DC24V/AC100~265V  
 Power : 36\*2W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: 190\*195\*H290mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-13003

Voltage: DC24V/AC100~265V  
 Power : 36\*2W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: 195\*195\*H290mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF

### LM-LH-FL-13003

Voltage: DC24V/AC100~265V  
 Power : 60\*2W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: 213\*213\*H280mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-13003

Voltage: DC24V/AC100~265V  
 Power : 60\*2W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: 213\*213\*H345mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512



### LM-LH-FL-3001

Voltage: DC24V/AC100~265V  
 Power : 24W/27W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 3/5/8/10/15/25/30/45/60°  
 Size: 150\*W70\*H150mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-3001

Voltage: DC24V/AC100~265V  
 Power : 48W/54W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 3/5/8/10/15/25/30/45/60°  
 Size: 300\*W70\*H150mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-3001

Voltage: DC24V/AC100~265V  
 Power : 72W/81W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 3/5/8/10/15/25/30/45/60°  
 Size: 450\*W70\*H150mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-3001


Voltage: DC24V/AC100~265V  
 Power : 24W/27W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: 150\*70\*H150mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF

### LM-LH-FL-3001

Voltage: DC24V/AC100~265V  
 Power : 48W/54W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: 300\*70\*H150mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512


### LM-LH-FL-3001

Voltage: DC24V/AC100~265V  
 Power : 72W/81W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: 450\*70\*H150mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

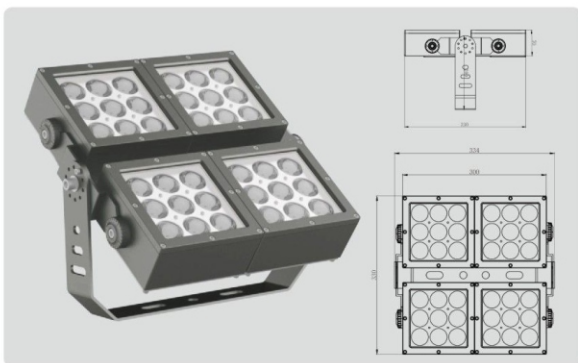

### LM-LH-FL-3001

Voltage: DC24V/AC100~265V  
 Power : 96W/108W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: 300\*W70\*H320mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

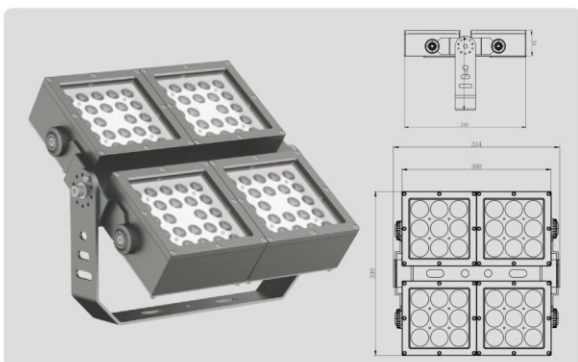

### LM-LH-FL-3001

Voltage: DC24V/AC100~265V  
 Power : 96W/108W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: 300\*W70\*H330mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512



### LM-LH-FL-13004

Voltage: DC24V/AC100~265V  
 Power : 54\*2W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: 305\*W200\*H275mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512



### LM-LH-FL-13004

Voltage: DC24V/AC100~265V  
 Power : 24\*4W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: 305\*200\*H275mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF



### LM-LH-FL-13004

Voltage: DC24V/AC100~265V  
 Power : 30\*5W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: 425\*200\*H350mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512



### LM-LH-FL-13004

Voltage: DC24V/AC100~265V  
 Power : 30\*5W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: 425\*420\*H370mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-13004

Voltage: DC24V/AC100~265V  
 Power : 72\*2W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: 420\*W200\*H350mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-13004

Voltage: DC24V/AC100~265V  
 Power : 72\*2W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: 525\*W420\*H370mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-13004

Voltage: DC24V/AC100~265V  
 Power : 90\*2W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: 525\*W200\*H350mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-13004

Voltage: DC24V/AC100~265V  
 Power : 90\*2W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: 525\*420\*H370mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF

### LM-LH-FL-13004

Voltage: DC24V/AC100~265V  
 Power : 108\*2W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: 575\*200\*H350mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-13004

Voltage: DC24V/AC100~265V  
 Power : 108\*2W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: 575\*420\*H370mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512



### LM-LH-FL-13004

Voltage: DC24V/AC100~265V  
 Power: 144\*2W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: L685\*W200\*H350mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-13004

Voltage: DC24V/AC100~265V  
 Power: 144\*2W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: L685\*W420\*H370mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-8001

Voltage: DC24V/AC100~265V  
 Power: 48W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: L215\*W215\*H60mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-8001

Voltage: DC24V/AC100~265V  
 Power: 108W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: L443\*W215\*H60mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF

### LM-LH-FL-8001

Voltage: DC24V/AC100~265V  
 Power: 144W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: L525\*W215\*H60mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-8001

Voltage: DC24V/AC100~265V  
 Power: 200W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: L725\*W215\*H60mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512



### LM-LH-FL-8001

Voltage: DC24V/AC100~265V  
Power : 200W  
LED Brand: Bridgelux/Osram/CREE/Philips  
Color: 2200K/2700K/3000K  
4000K/6000K/RGB/RGBW  
Beam angle: 10/15/25/30/45/60°  
Size: L525\*W215\*H327mm  
Material: Aluminum + Tempered Glass  
Waterproof rating: IP65  
Control method: ON/OFF DMX512




### LM-LH-FL-8001

Voltage: DC24V/AC100~265V  
Power : 400W  
LED Brand: Bridgelux/Osram/CREE/Philips  
Color: 2200K/2700K/3000K  
4000K/6000K/RGB/RGBW  
Beam angle: 10/15/25/30/45/60°  
Size: L525\*W450\*H310mm  
Material: Aluminum + Tempered Glass  
Waterproof rating: IP65  
Control method: ON/OFF DMX512




### LM-LH-FL-8002

Voltage: DC24V/AC100~265V  
Power : 72W  
LED Brand: Bridgelux/Osram/CREE/Philips  
Color: 2200K/2700K/3000K  
4000K/6000K/RGB/RGBW  
Beam angle: 10/15/25/30/45/60°  
Size: L326\*W215\*H327mm  
Material: Aluminum + Tempered Glass  
Waterproof rating: IP65  
Control method: ON/OFF DMX512

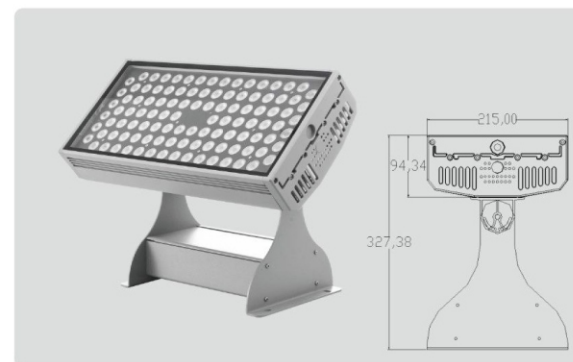


### LM-LH-FL-8002

Voltage: DC24V/AC100~265V  
Power : 108W  
LED Brand: Bridgelux/Osram/CREE/Philips  
Color: 2200K/2700K/3000K  
4000K/6000K/RGB/RGBW  
Beam angle: 10/15/25/30/45/60°  
Size: L443\*W215\*H327mm  
Material: Aluminum + Tempered Glass  
Waterproof rating: IP65  
Control method: ON/OFF

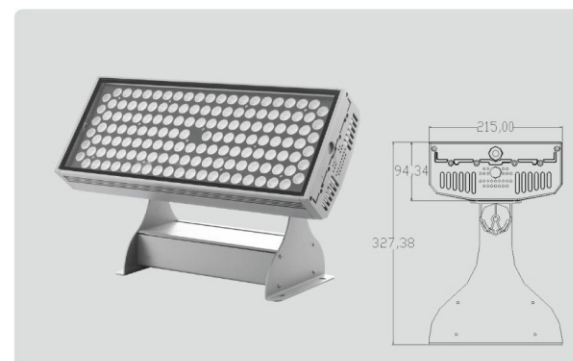

### LM-LH-FL-8002

Voltage: DC24V/AC100~265V  
Power : 144W  
LED Brand: Bridgelux/Osram/CREE/Philips  
Color: 2200K/2700K/3000K  
4000K/6000K/RGB/RGBW  
Beam angle: 10/15/25/30/45/60°  
Size: L525\*W215\*H327mm  
Material: Aluminum + Tempered Glass  
Waterproof rating: IP65  
Control method: ON/OFF DMX512

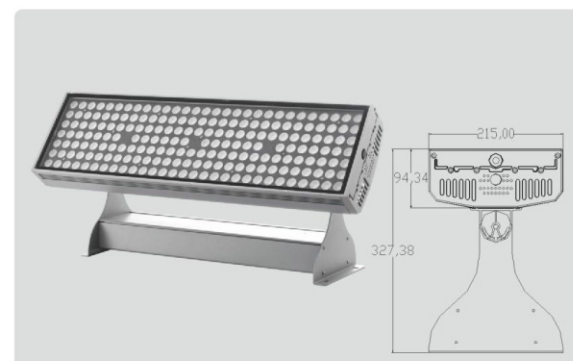

### LM-LH-FL-8002

Voltage: DC24V/AC100~265V  
Power : 200W  
LED Brand: Bridgelux/Osram/CREE/Philips  
Color: 2200K/2700K/3000K  
4000K/6000K/RGB/RGBW  
Beam angle: 10/15/25/30/45/60°  
Size: L755\*W215\*H217mm  
Material: Aluminum + Tempered Glass  
Waterproof rating: IP65  
Control method: ON/OFF DMX512

### LM-LH-FL-8003

Voltage: DC24V/AC100~265V  
 Power : 9-27W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: L140\*W138\*H110mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-8003

Voltage: DC24V/AC100~265V  
 Power : 27-54W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: L256\*W138\*H110mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-8003

Voltage: DC24V/AC100~265V  
 Power : 36-81W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: L372\*W138\*H60mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF DMX512

### LM-LH-FL-8003

Voltage: DC24V/AC100~265V  
 Power : 36\*108W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K/RGB/RGBW  
 Beam angle: 10/15/25/30/45/60°  
 Size: L500\*W173\*H60mm  
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF

### LM-LH-CD-3001A

Voltage: DC24V/AC100~265V  
 Power : 5/7/10/12/20/30/46W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K  
 Beam angle: 10/15/25/30/45/60°  
 Size:  $\Phi 60^{\circ} \Phi 80^{\circ} \Phi 100^{\circ} \Phi 120^{\circ} \Phi 140$   
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF

### LM-LH-CD-3001A

Voltage: DC24V/AC100~265V  
 Power : 5/7/10/12/20/30/46W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K  
 Beam angle: 10/15/25/30/45/60°  
 Size:  $\Phi 60^{\circ} \Phi 80^{\circ} \Phi 100^{\circ} \Phi 120^{\circ} \Phi 140$   
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF



### LM-LH-CD-3001A

Voltage: DC24V/AC100~265V  
 Power : 5/7/10/12/20/30/46W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K  
 Beam angle: 10/15/25/30/45/60°  
 Size:  $\Phi 60^* \Phi 80^* \Phi 100^* \Phi 120^* \Phi 140$   
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF

### LM-LH-CD-3001A

Voltage: DC24V/AC100~265V  
 Power : 5/7/10/12/20/30/46W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K  
 Beam angle: 10/15/25/30/45/60°  
 Size:  $\Phi 60^* \Phi 80^* \Phi 100^* \Phi 120^* \Phi 140$   
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF

### LM-LH-CD-3001A

Voltage: DC24V/AC100~265V  
 Power : 5/7/10/12/20/30/46W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K  
 Beam angle: 10/15/25/30/45/60°  
 Size:  $\Phi 60^* \Phi 80^* \Phi 100^* \Phi 120^* \Phi 140$   
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF

### LM-LH-CD-3001A


Voltage: DC24V/AC100~265V  
 Power : 5/7/10/12/20/30/46W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K  
 Beam angle: 10/15/25/30/45/60°  
 Size:  $\Phi 60^* \Phi 80^* \Phi 100^* \Phi 120^* \Phi 140$   
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF

### LM-LH-CD-3001A

Voltage: DC24V/AC100~265V  
 Power : 5/7/10/12/20/30/46W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K  
 Beam angle: 10/15/25/30/45/60°  
 Size:  $\Phi 60^* \Phi 80^* \Phi 100^* \Phi 120^* \Phi 140$   
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF


### LM-LH-CD-3001A

Voltage: DC24V/AC100~265V  
 Power : 5/7/10/12/20/30/46W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K  
 Beam angle: 10/15/25/30/45/60°  
 Size:  $\Phi 60^* \Phi 80^* \Phi 100^* \Phi 120^* \Phi 140$   
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF




### LM-LH-CD-3001A

Voltage: DC24V/AC100~265V  
 Power : 5/7/10/12/20/30/46W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K  
 Beam angle: 10/15/25/30/45/60°  
 Size:  $\Phi 60^{\circ} \times \Phi 80^{\circ} \times \Phi 100^{\circ} \times \Phi 120^{\circ} \times \Phi 140$   
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF




### LM-LH-CD-3001A

Voltage: DC24V/AC100~265V  
 Power : 5/7/10/12/20/30/46W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K  
 Beam angle: 10/15/25/30/45/60°  
 Size:  $\Phi 60^{\circ} \times \Phi 80^{\circ} \times \Phi 100^{\circ} \times \Phi 120^{\circ} \times \Phi 140$   
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF




### LM-LH-CD-3001A

Voltage: DC24V/AC100~265V  
 Power : 5/7/10/12/20/30/46W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K  
 Beam angle: 10/15/25/30/45/60°  
 Size:  $\Phi 60^{\circ} \times \Phi 80^{\circ} \times \Phi 100^{\circ} \times \Phi 120^{\circ} \times \Phi 140$   
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF



### LM-LH-CD-3001A

Voltage: DC24V/AC100~265V  
 Power : 5/7/10/12/20/30/46W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K  
 Beam angle: 10/15/25/30/45/60°  
 Size:  $\Phi 60^{\circ} \times \Phi 80^{\circ} \times \Phi 100^{\circ} \times \Phi 120^{\circ} \times \Phi 140$   
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF



### LM-LH-CD-3001A

Voltage: DC24V/AC100~265V  
 Power : 5/7/10/12/20/30/46W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K  
 Beam angle: 10/15/25/30/45/60°  
 Size:  $\Phi 60^{\circ} \times \Phi 80^{\circ} \times \Phi 100^{\circ} \times \Phi 120^{\circ} \times \Phi 140$   
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF



### LM-LH-CD-3001A

Voltage: DC24V/AC100~265V  
 Power : 5/7/10/12/20/30/46W  
 LED Brand: Bridgelux/Osram/CREE/Philips  
 Color: 2200K/2700K/3000K  
 4000K/6000K  
 Beam angle: 10/15/25/30/45/60°  
 Size:  $\Phi 60^{\circ} \times \Phi 80^{\circ} \times \Phi 100^{\circ} \times \Phi 120^{\circ} \times \Phi 140$   
 Material: Aluminum + Tempered Glass  
 Waterproof rating: IP65  
 Control method: ON/OFF