



LED STEP LIGHT



■ Product Features

- Fully sealed, waterproof design utilizing silicone sealing materials.
- Ensures an ingress protection rating of IP65 or higher.
- High luminous efficacy and high color rendering index (CRI).
- High-transmittance PMMA optical lens with a beam uniformity greater than 0.92.

LM-LH-TJ-1001

Voltage: DC24V
Power :2W
LED Brand: Bridgelux/Osram/CREE/Philips
Color: 2200K/2700K/3000K
4000K/6000K/RGB/RGBW
Beam angle: 10/15/25/30/45/60°
Size: Φ100*35mm
Material: aluminum + tempered glass
Waterproof rating: IP65
Control method: ON/OFF DMX512

LM-LH-TJ-1001

Voltage: DC24V
Power :3W
LED Brand: Bridgelux/Osram/CREE/Philips
Color: 2200K/2700K/3000K
4000K/6000K/RGB/RGBW
Beam angle: 10/15/25/30/45/60°
Size: Φ120*38mm
Material: aluminum + tempered glass
Waterproof rating: IP65
Control method: ON/OFF DMX512

LM-LH-TJ-1001

Voltage: DC24V
Power :4W
LED Brand: Bridgelux/Osram/CREE/Philips
Color: 2200K/2700K/3000K
4000K/6000K/RGB/RGBW
Beam angle: 10/15/25/30/45/60°
Size: Φ150*40mm
Material: aluminum + tempered glass
Waterproof rating: IP65
Control method: ON/OFF DMX512

LM-LH-TJ-1001

Voltage: DC24V
Power :3W
LED Brand: Bridgelux/Osram/CREE/Philips
Color: 2200K/2700K/3000K
4000K/6000K/RGB/RGBW
Beam angle: 10/15/25/30/45/60°
Size: Φ120*38mm
Material: aluminum + tempered glass
Waterproof rating: IP65
Control method: ON/OFF DMX512

LM-LH-TJ-1002

Voltage: DC24V
Power :2W
LED Brand: Bridgelux/Osram/CREE/Philips
Color: 2200K/2700K/3000K
4000K/6000K/RGB/RGBW
Beam angle: 10/15/25/30/45/60°
Size: Φ100*35mm
Material: aluminum + tempered glass
Waterproof rating: IP65
Control method: ON/OFF DMX512

LM-LH-TJ-1002


Voltage: DC24V
Power :3W
LED Brand: Bridgelux/Osram/CREE/Philips
Color: 2200K/2700K/3000K
4000K/6000K/RGB/RGBW
Beam angle: 10/15/25/30/45/60°
Size: Φ120*40mm
Material: aluminum + tempered glass
Waterproof rating: IP65
Control method: ON/OFF DMX512

LM-LH-TJ-1002

Voltage: DC24V
Power : 8W
LED Brand: Bridgelux/Osram/CREE/Philips
Color: 2200K/2700K/3000K
4000K/6000K/RGB/RGBW
Beam angle: 10/15/25/30/45/60°
Size: $\Phi 150 \times 45$ mm
Material: aluminum + tempered glass
Waterproof rating: IP65
Control method: ON/OFF DMX512

LM-LH-TJ-1002

Voltage: DC24V
Power : 8W
LED Brand: Bridgelux/Osram/CREE/Philips
Color: 2200K/2700K/3000K
4000K/6000K/RGB/RGBW
Beam angle: 10/15/25/30/45/60°
Size: $\Phi 150 \times 45$ mm
Material: aluminum + tempered glass
Waterproof rating: IP65
Control method: ON/OFF DMX512

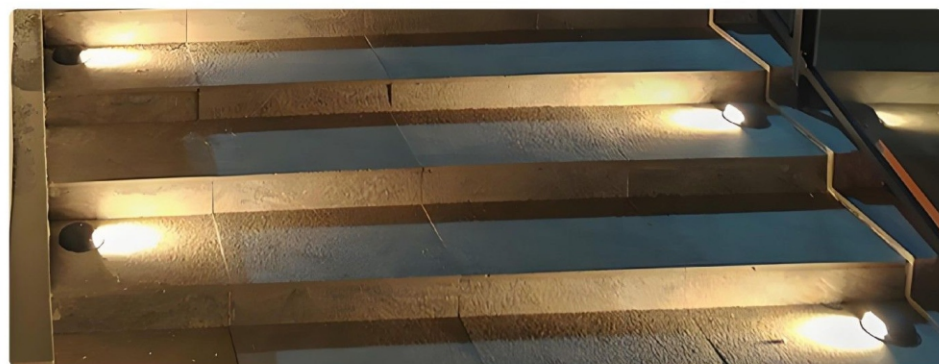

LM-LH-TJ-2001




Voltage: DC24V
Power : 5W
LED Brand: Bridgelux/Osram/CREE/Philips
Color: 2200K/2700K/3000K
4000K/6000K/RGB/RGBW
Beam angle: 10/15/25/30/45/60°
Size: 55*85mm
Material: aluminum + tempered glass
Waterproof rating: IP65
Control method: ON/OFF DMX512

LM-LH-TJ-2001

Voltage: DC24V
Power : 5W
LED Brand: Bridgelux/Osram/CREE/Philips
Color: 2200K/2700K/3000K
4000K/6000K/RGB/RGBW
Beam angle: 10/15/25/30/45/60°
Size: 80*80mm
Material: aluminum + tempered glass
Waterproof rating: IP65
Control method: ON/OFF DMX512

LM-LH-TJ-2001

Voltage: DC24V
Power : 3*3W
LED Brand: Bridgelux/Osram/CREE/Philips
Color: 2200K/2700K/3000K
4000K/6000K
Beam angle: 10/15/25/30/45/60°
Size: 110*110mm
Material: aluminum + tempered glass
Waterproof rating: IP65
Control method: ON/OFF

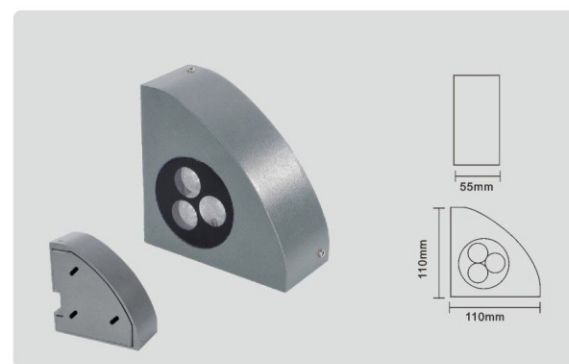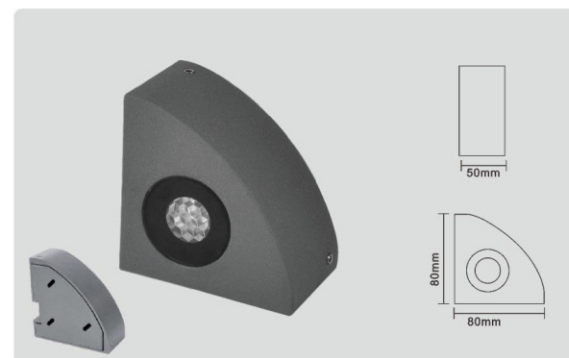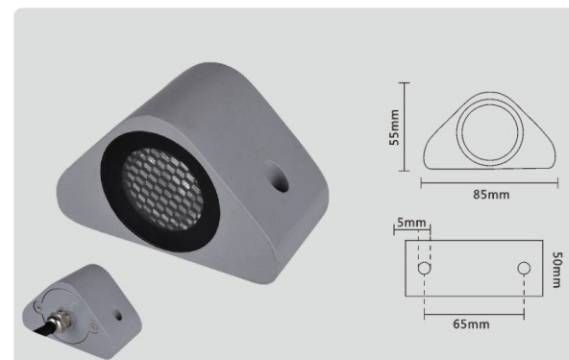

LM-LH-TJ-2001

Voltage: DC24V
 Power : 10W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K
 Beam angle: 10/15/25/30/45/60°
 Size: 110*110mm
 Material: aluminum + tempered glass
 Waterproof rating: IP65
 Control method: ON/OFF

LM-LH-TJ-2001

Voltage: DC24V
 Power : 5W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K
 Beam angle: 10/15/25/30/45/60°
 Size: 100*100mm
 Material: aluminum + tempered glass
 Waterproof rating: IP65
 Control method: ON/OFF

LM-LH-TJ-2001

Voltage: DC24V
 Power : 5W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K
 Beam angle: 10/15/25/30/45/60°
 Size: 120*120mm
 Material: aluminum + tempered glass
 Waterproof rating: IP65
 Control method: ON/OFF

LM-LH-TJ-2001

Voltage: DC24V
 Power : 3*2W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K
 Beam angle: 10/15/25/30/45/60°
 Size: 120*120mm
 Material: aluminum + tempered glass
 Waterproof rating: IP65
 Control method: ON/OFF

LM-LH-TJ-2001

Voltage: DC24V
 Power : 5W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K
 Beam angle: 10/15/25/30/45/60°
 Size: 80*50mm
 Material: aluminum + tempered glass
 Waterproof rating: IP65
 Control method: ON/OFF

LM-LH-TJ-2001

Voltage: DC24V
 Power : 2*3W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 10/15/25/30/45/60°
 Size: 80*50mm
 Material: aluminum + tempered glass
 Waterproof rating: IP65
 Control method: ON/OFF DMX512



LM-LH-TJ-2002

Voltage: DC24V
 Power : 3*2W/4W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 10/15/25/30/45/60°
 Size: Φ109*75*57mm
 Material: aluminum + tempered glass
 Waterproof rating: IP65
 Control method: ON/OFF DMX512



LM-LH-TJ-2002

Voltage: DC24V
 Power : 5*2W/6W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 10/15/25/30/45/60°
 Size: Φ130*85*66mm
 Material: aluminum + tempered glass
 Waterproof rating: IP65
 Control method: ON/OFF DMX512



Address: Building 4, Beiguang Industrial Park, No. 269,
 Liangbai Road, Longgang District, Shenzhen
 Tel: +86 133 2280 6730
 Email: sales@lummilight.com
 Website: <https://www.lummilight.com>