




LED UNDERGROUND LIGHT

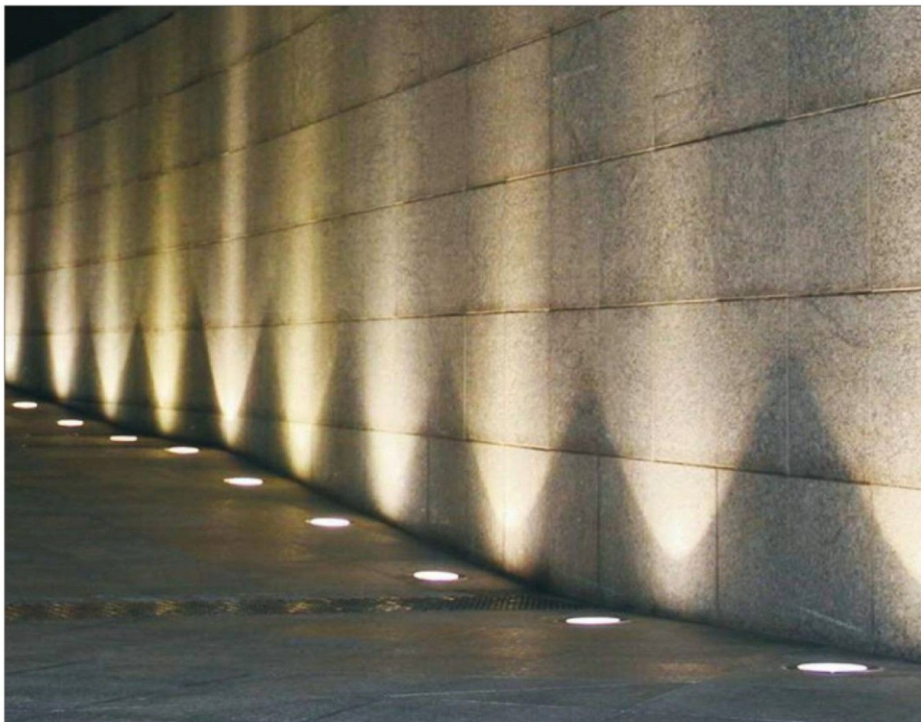

Product Features

- Fully sealed, waterproof design utilizing silicone sealing materials.
- Ensures an ingress protection rating of IP65 or higher.
- High luminous efficacy and high color rendering index (CRI).
- High-transmittance PMMA optical lens with a beam uniformity greater than 0.92.

LED Underground Light



LM-LH-DM-1001

Voltage: DC24V/AC100~265V

Power :1W

LED Brand: Bridgelux/Osram/CREE/Philips

Color: 2200K/2700K/3000K
4000K/6000K/RGB/RGBW

Beam angle: 10/15/25/30/45/60°

Size: Outer diameter: $\Phi 65 \times 80 \text{mm}$
Pre-drilled hole: $\Phi 60 \text{mm}$

Material: Aluminum + Tempered Glass

Waterproof rating: IP65

Control method: ON/OFF DMX512



LM-LH-DM-1001

Voltage: DC24V/AC100~265V

Power : 3W

LED Brand: Bridgelux/Osram/CREE/Philips

Color: 2200K/2700K/3000K
4000K/6000K/RGB/RGBW

Beam angle: 10/15/25/30/45/60°

Size: Outer diameter: $\Phi 80 \times 80 \text{mm}$
Pre-drilled hole: $\Phi 75 \text{mm}$

Material: Aluminum + Tempered Glass

Waterproof rating: IP65

Control method: ON/OFF DMX512



LM-LH-DM-1001

Voltage: DC24V/AC100~265V

Power : 3W

LED Brand: Bridgelux/Osram/CREE/Philips

Color: 2200K/2700K/3000K
4000K/6000K/RGB/RGBW

Beam angle: 10/15/25/30/45/60°

Size: Outer diameter: $\Phi 100 \times 80 \text{mm}$
Pre-drilled hole: $\Phi 97 \text{mm}$

Material: Aluminum + Tempered Glass

Waterproof rating: IP65

Control method: ON/OFF DMX512

LM-LH-DM-1001

Voltage: DC24V/AC100~265V
 Power : 6W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 10/15/25/30/45/60°
 Size: Outer diameter: $\Phi 120 \times 90$ mm
 Pre-drilled hole: $\Phi 108$ mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF DMX512

LM-LH-DM-1001

Voltage: DC24V/AC100~265V
 Power : 6W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 10/15/25/30/45/60°
 Size: Outer diameter: $\Phi 150 \times 90$ mm
 Pre-drilled hole: $\Phi 128$ mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF DMX512

LM-LH-DM-1001

Voltage: DC24V/AC100~265V
 Power : 9W/12W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 10/15/25/30/45/60°
 Size: Outer diameter: $\Phi 180 \times 90$ mm
 Pre-drilled hole: $\Phi 158$ mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF DMX512

LM-LH-DM-1001

Voltage: DC24V/AC100~265V
 Power : 15W/18W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 10/15/25/30/45/60°
 Size: Outer diameter: $\Phi 200 \times 90$ mm
 Pre-drilled hole: $\Phi 188$ mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF DMX512

LM-LH-DM-1001

Voltage: DC24V/AC100~265V
 Power : 18W/24W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 10/15/25/30/45/60°
 Size: Outer diameter: $\Phi 220 \times 90$ mm
 Pre-drilled hole: $\Phi 208$ mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF DMX512

LM-LH-DM-1001

Voltage: DC24V/AC100~265V
 Power : 36W/48W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 10/15/25/30/45/60°
 Size: Outer diameter: $\Phi 250 \times 90$ mm
 Pre-drilled hole: $\Phi 238$ mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF DMX512

LM-LH-DM-1001

Voltage: DC24V/AC100~265V
 Power : 36W/48W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 10/15/25/30/45/60°
 Size: Outer diameter: $\Phi 300 \times 90$ mm
 Pre-drilled hole: $\Phi 288$ mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF DMX512

LM-LH-DM-2001

Voltage: DC24V/AC100~265V
 Power : 3W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 10/15/25/30/45/60°
 Size: Outer diameter: $\Phi 100 \times 90$ mm
 Pre-drilled hole: $\Phi 95$ mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF DMX512

LM-LH-DM-2002

Voltage: DC24V/AC100~265V
 Power : 6W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 10/15/25/30/45/60°
 Size: Outer diameter: $\Phi 130 \times 90$ mm
 Pre-drilled hole: $\Phi 115$ mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF DMX512

LM-LH-DM-2002

Voltage: DC24V/AC100~265V
 Power : 9W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 10/15/25/30/45/60°
 Size: Outer diameter: $\Phi 150 \times 90$ mm
 Pre-drilled hole: $\Phi 135$ mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF DMX512

LM-LH-DM-2002

Voltage: DC24V/AC100~265V
 Power : 12W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 10/15/25/30/45/60°
 Size: Outer diameter: $\Phi 180 \times 90$ mm
 Pre-drilled hole: $\Phi 154$ mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF DMX512

LM-LH-DM-2002

Voltage: DC24V/AC100~265V
 Power : 18W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 10/15/25/30/45/60°
 Size: Outer diameter: $\Phi 200 \times 90$ mm
 Pre-drilled hole: $\Phi 185$ mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF DMX512

LM-LH-DM-2001

Voltage: DC24V/AC100~265V
 Power : 36W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 10/15/25/30/45/60°
 Size: Outer diameter: $\Phi 250 \times 95\text{mm}$
 Pre-drilled hole: $\Phi 235\text{mm}$
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF DMX512

LM-LH-DM-2001

Voltage: DC24V/AC100~265V
 Power : 48W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 10/15/25/30/45/60°
 Size: Outer diameter: $\Phi 300 \times 90\text{mm}$
 Pre-drilled hole: $\Phi 285\text{mm}$
 Material: Stainless Steel + Tempered Glass
 Waterproof rating: IP68
 Control method: ON/OFF DMX512

LM-LH-DM-2002

Voltage: DC24V/AC100~265V
 Power : 3W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 10/15/25/30/45/60°
 Size: Outer diameter: $\Phi 100 \times 80\text{mm}$
 Pre-drilled hole: $\Phi 90\text{mm}$
 Material: Stainless Steel + Tempered Glass
 Waterproof rating: IP68
 Control method: ON/OFF DMX512

IP68

LM-LH-DM-2002

Voltage: DC24V/AC100~265V
 Power : 5-7W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 10/15/25/30/45/60°
 Size: Outer diameter: $\Phi 120 \times 95\text{mm}$
 Pre-drilled hole: $\Phi 118\text{mm}$
 Material: Stainless Steel + Tempered Glass
 Waterproof rating: IP68
 Control method: ON/OFF DMX512

IP68

LM-LH-DM-2002

Voltage: DC24V/AC100~265V
 Power : 7-9W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 10/15/25/30/45/60°
 Size: Outer diameter: $\Phi 160 \times 95\text{mm}$
 Pre-drilled hole: $\Phi 138\text{mm}$
 Material: Stainless Steel + Tempered Glass
 Waterproof rating: IP68
 Control method: ON/OFF DMX512

IP68

LM-LH-DM-2002

Voltage: DC24V/AC100~265V
 Power : 9-12W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 10/15/25/30/45/60°
 Size: Outer diameter: $\Phi 180 \times 95\text{mm}$
 Pre-drilled hole: $\Phi 162\text{mm}$
 Material: Stainless Steel + Tempered Glass
 Waterproof rating: IP68
 Control method: ON/OFF DMX512




LM-LH-DM-2002

Voltage: DC24V/AC100~265V
 Power : 15-18W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 10/15/25/30/45/60°
 Size: Outer diameter: $\Phi 200*95\text{mm}$
 Pre-drilled hole: $\Phi 170\text{mm}$
 Material: Stainless Steel + Tempered Glass
 Waterproof rating: IP68
 Control method: ON/OFF DMX512



LM-LH-DM-2002

Voltage: DC24V/AC100~265V
 Power : 24W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 10/15/25/30/45/60°
 Size: Outer diameter: $\Phi 220*95\text{mm}$
 Pre-drilled hole: $\Phi 195\text{mm}$
 Material: Stainless Steel + Tempered Glass
 Waterproof rating: IP68
 Control method: ON/OFF DMX512

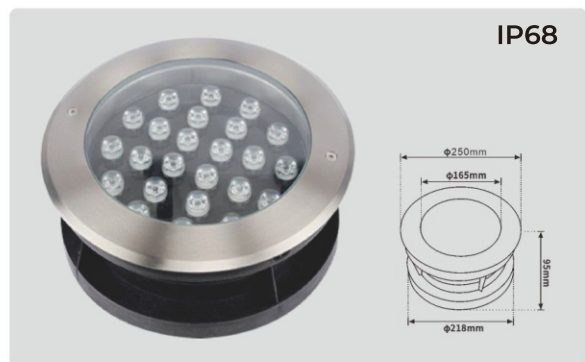

LM-LH-DM-2002

Voltage: DC24V/AC100~265V
 Power : 36W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 10/15/25/30/45/60°
 Size: Outer diameter: $\Phi 350*95\text{mm}$
 Pre-drilled hole: $\Phi 218\text{mm}$
 Material: Stainless Steel + Tempered Glass
 Waterproof rating: IP68
 Control method: ON/OFF DMX512



LM-LH-DM-2002

Voltage: DC24V/AC100~265V
 Power : 48W-54W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 10/15/25/30/45/60°
 Size: Outer diameter: $\Phi 300*95\text{mm}$
 Pre-drilled hole: $\Phi 242\text{mm}$
 Material: Stainless Steel + Tempered Glass
 Waterproof rating: IP68
 Control method: ON/OFF DMX512



LM-LH-DM-3001

Voltage: DC24V/AC100~265V
 Power : 3W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 10/15/25/30/45/60°
 Size: Outer diameter: $\Phi 85*95\text{mm}$
 Pre-drilled hole: $\Phi 80\text{mm}$
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF DMX512



LM-LH-DM-3001

Voltage: DC24V/AC100~265V
 Power : 3W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 10/15/25/30/45/60°
 Size: Outer diameter: $\Phi 100*100\text{mm}$
 Pre-drilled hole: $\Phi 90\text{mm}$
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF DMX512

LM-LH-DM-3001

Voltage: DC24V/AC100~265V
 Power : 5W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 10/15/25/30/45/60°
 Size: Outer diameter: $\Phi 130 \times 95$ mm
 Pre-drilled hole: $\Phi 120$ mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF DMX512

LM-LH-DM-3001

Voltage: DC24V/AC100~265V
 Power : 6W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 10/15/25/30/45/60°
 Size: Outer diameter: $\Phi 130 \times 95$ mm
 Pre-drilled hole: $\Phi 120$ mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF DMX512

LM-LH-DM-3001

Voltage: DC24V/AC100~265V
 Power : 9W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 10/15/25/30/45/60°
 Size: Outer diameter: $\Phi 160 \times 105$ mm
 Pre-drilled hole: $\Phi 145$ mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF DMX512

LM-LH-DM-3001

Voltage: DC24V/AC100~265V
 Power : 12W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 10/15/25/30/45/60°
 Size: Outer diameter: $\Phi 190 \times 125$ mm
 Pre-drilled hole: $\Phi 175$ mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF DMX512

LM-LH-DM-3001

Voltage: DC24V/AC100~265V
 Power : 15W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 10/15/25/30/45/60°
 Size: Outer diameter: $\Phi 210 \times 135$ mm
 Pre-drilled hole: $\Phi 196$ mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF DMX512

LM-LH-DM-3001


Voltage: DC24V/AC100~265V
 Power : 18W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 10/15/25/30/45/60°
 Size: Outer diameter: $\Phi 240 \times 145$ mm
 Pre-drilled hole: $\Phi 225$ mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF DMX512

LM-LH-DM-3001

Voltage: DC24V/AC100~265V
 Power : 24W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 10/15/25/30/45/60°
 Size: Outer diameter: $\Phi 260 \times 125$ mm
 Pre-drilled hole: $\Phi 240$ mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF DMX512

LM-LH-DM-3001

Voltage: DC24V/AC100~265V
 Power : 36W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 10/15/25/30/45/60°
 Size: Outer diameter: $\Phi 320 \times 105$ mm
 Pre-drilled hole: $\Phi 240$ mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF DMX512

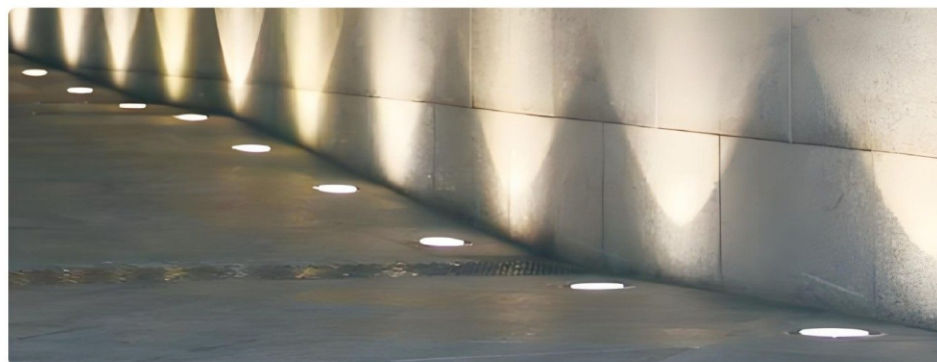

IP68

LM-LH-DM-4001

Voltage: DC24V/AC100~265V
 Power : 1W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 10/15/25/30/45/60°
 Size: Outer diameter: $\Phi 42 \times 86$ mm
 Pre-drilled hole: $\Phi 38$ mm
 Material: 304 Stainless Steel
 Waterproof rating: IP68
 Control method: ON/OFF DMX512

IP68


LM-LH-DM-4001

Voltage: DC24V/AC100~265V
 Power : 1W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 10/15/25/30/45/60°
 Size: Outer diameter: $\Phi 52 \times 96$ mm
 Pre-drilled hole: $\Phi 46$ mm
 Material: 304 Stainless Steel
 Waterproof rating: IP68
 Control method: ON/OFF DMX512

IP68

LM-LH-DM-4001

Voltage: DC24V/AC100~265V
 Power : 1W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 10/15/25/30/45/60°
 Size: Outer diameter: $\Phi 62 \times 106$ mm
 Pre-drilled hole: $\Phi 56$ mm
 Material: 304 Stainless Steel
 Waterproof rating: IP68
 Control method: ON/OFF DMX512

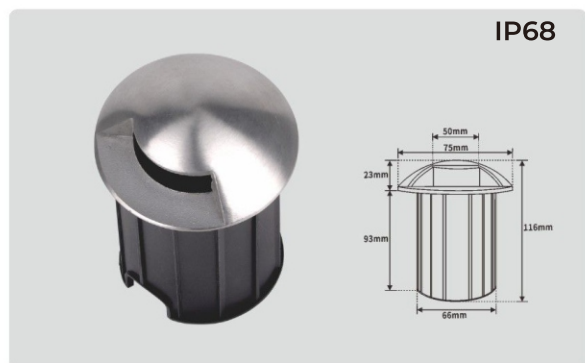

IP68

LM-LH-DM-4001

Voltage: DC24V/AC100~265V
Power : 3W
LED Brand: Bridgelux/Osram/CREE/Philips
Color: 2200K/2700K/3000K
4000K/6000K/RGB/RGBW
Beam angle: 10/15/25/30/45/60°
Size: Outer diameter: $\Phi 75 \times 116$ mm
Pre-drilled hole: $\Phi 66$ mm
Material: 304 Stainless Steel
Waterproof rating: IP68
Control method: ON/OFF DMX512



IP68

LM-LH-DM-4001

Voltage: DC24V/AC100~265V
Power : 1W
LED Brand: Bridgelux/Osram/CREE/Philips
Color: 2200K/2700K/3000K
4000K/6000K/RGB/RGBW
Beam angle: 10/15/25/30/45/60°
Size: Outer diameter: $\Phi 42 \times 73$ mm
Pre-drilled hole: $\Phi 38$ mm
Material: 304 Stainless Steel
Waterproof rating: IP68
Control method: ON/OFF DMX512



IP68

LM-LH-DM-4001

Voltage: DC24V/AC100~265V
Power : 1W
LED Brand: Bridgelux/Osram/CREE/Philips
Color: 2200K/2700K/3000K
4000K/6000K/RGB/RGBW
Beam angle: 10/15/25/30/45/60°
Size: Outer diameter: $\Phi 52 \times 83$ mm
Pre-drilled hole: $\Phi 46$ mm
Material: 304 Stainless Steel
Waterproof rating: IP68
Control method: ON/OFF DMX512



IP68

LM-LH-DM-4001

Voltage: DC24V/AC100~265V
Power : 1W
LED Brand: Bridgelux/Osram/CREE/Philips
Color: 2200K/2700K/3000K
4000K/6000K/RGB/RGBW
Beam angle: 10/15/25/30/45/60°
Size: Outer diameter: $\Phi 62 \times 88$ mm
Pre-drilled hole: $\Phi 56$ mm
Material: 304 Stainless Steel
Waterproof rating: IP68
Control method: ON/OFF DMX512



IP68

LM-LH-DM-4001

Voltage: DC24V/AC100~265V
Power : 3W
LED Brand: Bridgelux/Osram/CREE/Philips
Color: 2200K/2700K/3000K
4000K/6000K/RGB/RGBW
Beam angle: 10/15/25/30/45/60°
Size: Outer diameter: $\Phi 75 \times 96$ mm
Pre-drilled hole: $\Phi 66$ mm
Material: 304 Stainless Steel
Waterproof rating: IP68
Control method: ON/OFF DMX512



IP68

LM-LH-DM-4001

Voltage: DC24V/AC100~265V
Power : 1W
LED Brand: Bridgelux/Osram/CREE/Philips
Color: 2200K/2700K/3000K
4000K/6000K/RGB/RGBW
Beam angle: 10/15/25/30/45/60°
Size: Outer diameter: $\Phi 32 \times 50$ mm
Pre-drilled hole: $\Phi 26$ mm
Material: 304 Stainless Steel
Waterproof rating: IP68
Control method: ON/OFF DMX512

LM-LH-DMD-ZL




Voltage: DC24V/AC100~265V
 Power : 3W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 10/15/25/30/45/60°
 Size: Outer diameter: $\Phi 100$ mm
 Pre-drilled hole: $\Phi 94$ mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF DMX512

LM-LH-DMD-ZL

Voltage: DC24V/AC100~265V
 Power : 6W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 10/15/25/30/45/60°
 Size: Outer diameter: $\Phi 130$ mm
 Pre-drilled hole: $\Phi 120$ mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF DMX512

LM-LH-DMD-ZL

Voltage: DC24V/AC100~265V
 Power : 9W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 10/15/25/30/45/60°
 Size: Outer diameter: $\Phi 150$ mm
 Pre-drilled hole: $\Phi 140$ mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF DMX512

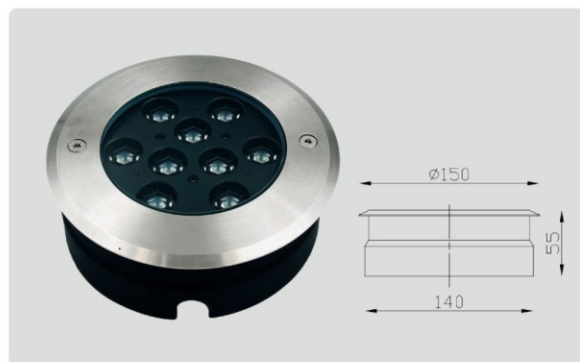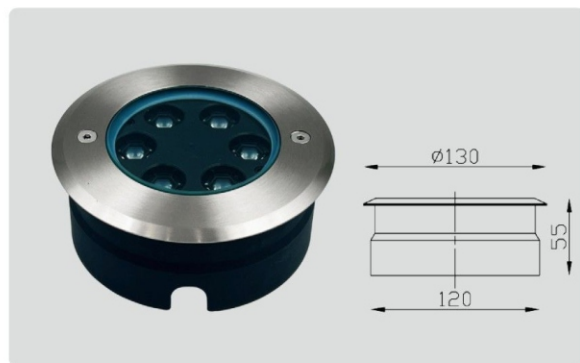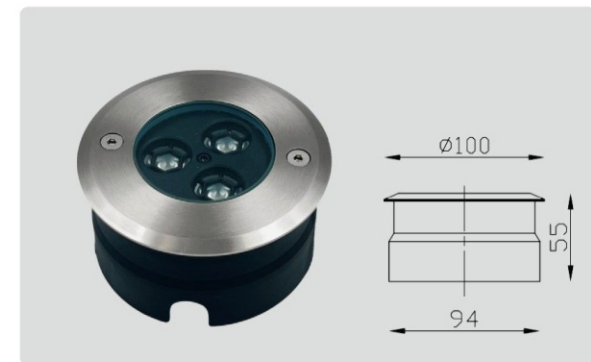


LM-LH-DMD-ZL


Voltage: DC24V/AC100~265V
 Power : 12W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 10/15/25/30/45/60°
 Size: Outer diameter: $\Phi 180$ mm
 Pre-drilled hole: $\Phi 175$ mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF DMX512

LM-LH-DMD-ZL

Voltage: DC24V/AC100~265V
 Power : 18W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 10/15/25/30/45/60°
 Size: Outer diameter: $\Phi 210$ mm
 Pre-drilled hole: $\Phi 202$ mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF DMX512

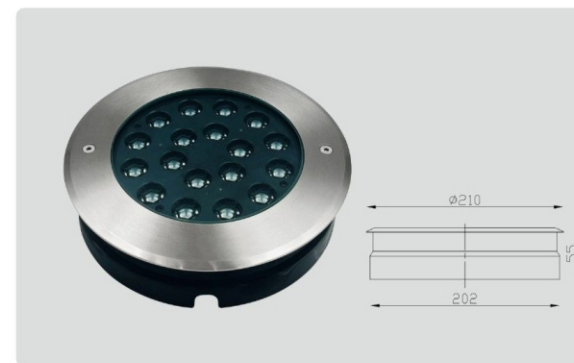


Adjustable angle



LM-LH-DM-T

Voltage: DC24V/AC100~265V
Power : 3W/5W
LED Brand: Bridgelux/Osram/CREE/Philips
Color: 2200K/2700K/3000K
4000K/6000K/RGB/RGBW
Beam angle: 10/15/25/30/45/60°
Size: Outer diameter: 150*145mm
Pre-drilled hole: Φ 143*145mm
Material: Aluminum + Tempered Glass
Waterproof rating: IP65
Control method: ON/OFF DMX512


Adjustable angle



LM-LH-DM-T

Voltage: DC24V/AC100~265V
Power : 6W/9W
LED Brand: Bridgelux/Osram/CREE/Philips
Color: 2200K/2700K/3000K
4000K/6000K/RGB/RGBW
Beam angle: 10/15/25/30/45/60°
Size: Outer diameter: 180*158mm
Pre-drilled hole: Φ 168*158mm
Material: Aluminum + Tempered Glass
Waterproof rating: IP65
Control method: ON/OFF DMX512


Adjustable angle



LM-LH-DM-T

Voltage: DC24V/AC100~265V
Power : 12W/18W
LED Brand: Bridgelux/Osram/CREE/Philips
Color: 2200K/2700K/3000K
4000K/6000K/RGB/RGBW
Beam angle: 10/15/25/30/45/60°
Size: Outer diameter: 210*168mm
Pre-drilled hole: Φ 198*168mm
Material: Aluminum + Tempered Glass
Waterproof rating: IP65
Control method: ON/OFF DMX512


Adjustable angle



LM-LH-DM-T

Voltage: DC24V/AC100~265V
Power : 24W
LED Brand: Bridgelux/Osram/CREE/Philips
Color: 2200K/2700K/3000K
4000K/6000K/RGB/RGBW
Beam angle: 10/15/25/30/45/60°
Size: Outer diameter: 230*178mm
Pre-drilled hole: Φ 218*178mm
Material: Aluminum + Tempered Glass
Waterproof rating: IP65
Control method: ON/OFF DMX512

Adjustable angle




LM-LH-DM-T

Voltage: DC24V/AC100~265V
Power : 36W
LED Brand: Bridgelux/Osram/CREE/Philips
Color: 2200K/2700K/3000K
4000K/6000K/RGB/RGBW
Beam angle: 10/15/25/30/45/60°
Size: Outer diameter: 260*198mm
Pre-drilled hole: Φ 243*198mm
Material: Aluminum + Tempered Glass
Waterproof rating: IP65
Control method: ON/OFF DMX512

LM-LH-FDM-1001

Voltage: DC24V/AC100~265V
Power : 3W
LED Brand: Bridgelux/Osram/CREE/Philips
Color: 2200K/2700K/3000K
4000K/6000K/RGB/RGBW
Beam angle: 10/15/25/30/45/60°
Size: Outer diameter: L100*W100*H75mm
Pre-drilled hole: Φ 90*90*75mm
Material: Aluminum + Tempered Glass
Waterproof rating: IP65
Control method: ON/OFF DMX512



LM-LH-FDM-1001

Voltage: DC24V/AC100~265V
 Power : 5W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 10/15/25/30/45/60°
 Size: Outer diameter: L120*W120*H75mm
 Pre-drilled hole: Φ110*110*75mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF DMX512

LM-LH-FDM-1001

Voltage: DC24V/AC100~265V
 Power : 6W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 10/15/25/30/45/60°
 Size: Outer diameter: L120*W120*H75mm
 Pre-drilled hole: Φ110*110*75mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF DMX512

LM-LH-FDM-1001

Voltage: DC24V/AC100~265V
 Power : 9W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 10/15/25/30/45/60°
 Size: Outer diameter: L150*W150*H75mm
 Pre-drilled hole: Φ130*130*75mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF DMX512

LM-LH-FDM-1001

Voltage: DC24V/AC100~265V
 Power : 12W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 10/15/25/30/45/60°
 Size: Outer diameter: L200*W200*H75mm
 Pre-drilled hole: Φ180*180*75mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF DMX512

LM-LH-FDM-1001


Voltage: DC24V/AC100~265V
 Power : 24W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 10/15/25/30/45/60°
 Size: Outer diameter: L250*W250*H75mm
 Pre-drilled hole: Φ230*230*75mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF DMX512

LM-LH-FDM-1001

Voltage: DC24V/AC100~265V
 Power : 36W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 10/15/25/30/45/60°
 Size: Outer diameter: L300*W300*H75mm
 Pre-drilled hole: Φ280*280*75mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF DMX512


LM-LH-TXDM-2001

Voltage: DC24V/AC100~265V
 Power : 6W/9W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 10/15/25/30/45/60°
 Size: 300*55*80mm
 Pre-drilled hole: L292*W52*H80mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF




LM-LH-TXDM-2001

Voltage: DC24V/AC100~265V
 Power : 12W/18W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 10/15/25/30/45/60°
 Size: 520*55*80mm
 Pre-drilled hole: L512*W52*H80mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF



LM-LH-TXDM-2001


Voltage: DC24V/AC100~265V
 Power : 18W/24W/36W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K
 Beam angle: 10/15/25/30/45/60°
 Size: 1000*55*80mm
 Pre-drilled hole: L992*W52*H80mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF



Deep anti-glare


LM-LH-TXDM-2001

Voltage: DC24V/AC100~265V
 Power : 6W/9W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K
 Beam angle: 10/15/25/30/45/60°
 Size: 300*70*90mm
 Pre-drilled hole: L292*W60*H90mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF




LM-LH-TXDM-2001

Voltage: DC24V/AC100~265V
 Power : 9W/12W/18W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K
 Beam angle: 10/15/25/30/45/60°
 Size: 520*70*90mm
 Pre-drilled hole: L512*W60*H90mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF



LM-LH-TXDM-2001

Voltage: DC24V/AC100~265V
 Power : 18W/24W/36W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K
 Beam angle: 10/15/25/30/45/60°
 Size: 1000*70*90mm
 Pre-drilled hole: L992*W60*H90mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF



LM-LH-TXDM-2001

Voltage: DC24V/AC100~265V
 Power : 6W/9W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 10/15/25/30/45/60°
 Size: 300*90*90mm
 Pre-drilled hole: L293*W78*H90mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF


LM-LH-TXDM-2001

Voltage: DC24V/AC100~265V
 Power : 9W/12W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 10/15/25/30/45/60°
 Size: 500*90*90mm
 Pre-drilled hole: L493*W78*H90mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF

LM-LH-TXDM-2001

Voltage: DC24V/AC100~265V
 Power : 18W/24W/36W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 10/15/25/30/45/60°
 Size: 1000*90*90mm
 Pre-drilled hole: L993*W78*H90mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF


Double-row

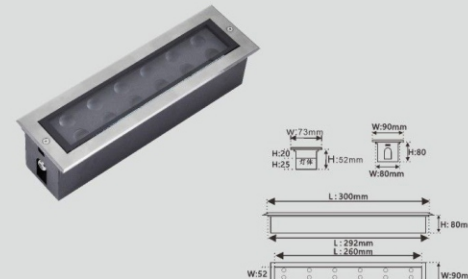

LM-LH-TXDM-2001

Voltage: DC24V/AC100~265V
 Power : 12W/18W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K
 Beam angle: 10/15/25/30/45/60°
 Size: 300*90*80mm
 Pre-drilled hole: L292*W80*H80mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF


Double-row

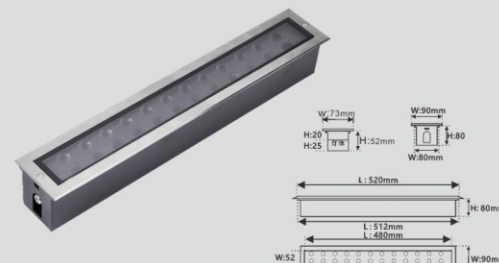

LM-LH-TXDM-2001

Voltage: DC24V/AC100~265V
 Power : 18W/24W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K
 Beam angle: 10/15/25/30/45/60°
 Size: 520*90*80mm
 Pre-drilled hole: L512*W80*H80mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF


Double-row

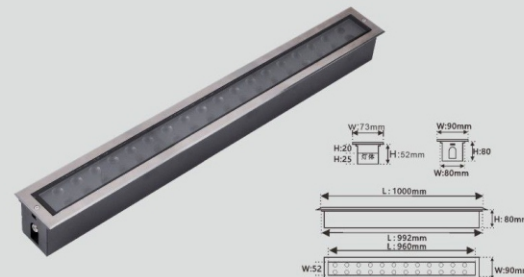

LM-LH-TXDM-2001

Voltage: DC24V/AC100~265V
 Power : 24W/36W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K
 Beam angle: 10/15/25/30/45/60°
 Size: 1000*90*80mm
 Pre-drilled hole: L990*W80*H80mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF


Adjustable angle

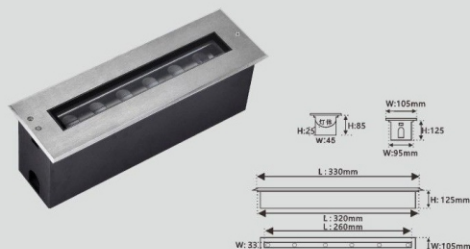

LM-LH-TXDM-2001

Voltage: DC24V/AC100~265V
 Power : 6W/9W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K
 Beam angle: 10/15/25/30/45/60°
 Size: 330*105*125mm
 Pre-drilled hole: L320*W95*H125mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF


Adjustable angle

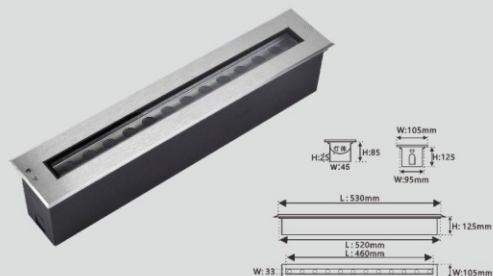

LM-LH-TXDM-2001

Voltage: DC24V/AC100~265V
 Power : 9W/12W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K
 Beam angle: 10/15/25/30/45/60°
 Size: 530*105*125mm
 Pre-drilled hole: L520*W95*H125mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF

Adjustable angle

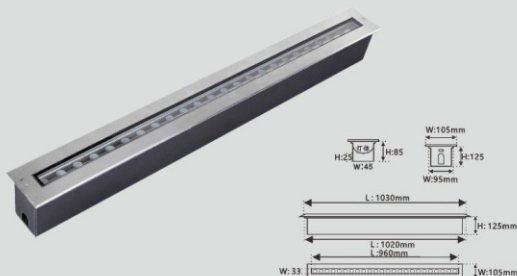

LM-LH-TXDM-2001

Voltage: DC24V/AC100~265V
 Power : 18W/24W/36W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K
 Beam angle: 10/15/25/30/45/60°
 Size: 1030*105*125mm
 Pre-drilled hole: L1020*W95*H125mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF