



LED WALL LIGHT



■ Product Features

- Fully sealed, waterproof design utilizing silicone sealing materials.
- Ensures an ingress protection rating of IP65 or higher.
- High luminous efficacy and high color rendering index (CRI).
- High-transmittance PMMA optical lens with a beam uniformity greater than 0.92.

Single-head



LM-LH-BD-1001

Voltage: DC24V/AC100~265V
Power : 3W/6W
LED Brand: Bridgelux/Osram/CREE/Philips
Color: 2200K/2700K/3000K
4000K/6000K
Beam angle: 10/15/25/30/45/60°
Size: Φ65*160mm/Φ90*160mm
Material: Aluminum + Tempered Glass
Waterproof rating: IP65
Control method: ON/OFF

Single-head



LM-LH-BD-1001

Voltage: DC24V/AC100~265V
Power : 9-12W/12-18W
LED Brand: Bridgelux/Osram/CREE/Philips
Color: 2200K/2700K/3000K
4000K/6000K
Beam angle: 10/15/25/30/45/60°
Size: Φ108*200mm/Φ145*200mm
Material: Aluminum + Tempered Glass
Waterproof rating: IP65
Control method: ON/OFF

Single-head



LM-LH-BD-1001

Voltage: DC24V/AC100~265V
Power : 18-24W
LED Brand: Bridgelux/Osram/CREE/Philips
Color: 2200K/2700K/3000K
4000K/6000K
Beam angle: 10/15/25/30/45/60°
Size: Φ160*250mm
Material: Aluminum + Tempered Glass
Waterproof rating: IP65
Control method: ON/OFF

Double-head



LM-LH-BD-1001

Voltage: DC24V/AC100~265V
Power : 3W*2/6W*2
LED Brand: Bridgelux/Osram/CREE/Philips
Color: 2200K/2700K/3000K
4000K/6000K
Beam angle: 10/15/25/30/45/60°
Size: Φ65*160mm/Φ90*160mm
Material: Aluminum + Tempered Glass
Waterproof rating: IP65
Control method: ON/OFF

Double-head



LM-LH-BD-1001

Voltage: DC24V/AC100~265V
Power : 9-12W*2/12-18W*2
LED Brand: Bridgelux/Osram/CREE/Philips
Color: 2200K/2700K/3000K
4000K/6000K
Beam angle: 10/15/25/30/45/60°
Size: Φ108*200mm/Φ145*200mm
Material: Aluminum + Tempered Glass
Waterproof rating: IP65
Control method: ON/OFF

Double-head



LM-LH-BD-1001

Voltage: DC24V/AC100~265V
Power : 18-24W*2
LED Brand: Bridgelux/Osram/CREE/Philips
Color: 2200K/2700K/3000K
4000K/6000K
Beam angle: 10/15/25/30/45/60°
Size: Φ160*250mm
Material: Aluminum + Tempered Glass
Waterproof rating: IP65
Control method: ON/OFF

Single-head



LM-LH-BD-1002

Voltage: DC24V/AC100~265V
Power : 3W/5-10W
LED Brand: Bridgelux/Osram/CREE/Philips
Color: 2200K/2700K/3000K
4000K/6000K
Beam angle: 24/36°
Size: Φ65*160mm/Φ90*160mm
Material: Aluminum + Tempered Glass
Waterproof rating: IP65
Control method: ON/OFF

Single-head



LM-LH-BD-1002

Voltage: DC24V/AC100~265V
Power : 9-15W/15-18W
LED Brand: Bridgelux/Osram/CREE/Philips
Color: 2200K/2700K/3000K
4000K/6000K
Beam angle: 24/36°
Size: Φ108*200mm/Φ145*200mm
Material: Aluminum + Tempered Glass
Waterproof rating: IP65
Control method: ON/OFF

Single-head



LM-LH-BD-1002

Voltage: DC24V/AC100~265V
Power : 18-24W
LED Brand: Bridgelux/Osram/CREE/Philips
Color: 2200K/2700K/3000K
4000K/6000K
Beam angle: 24/36°
Size: Φ160*250mm
Material: Aluminum + Tempered Glass
Waterproof rating: IP65
Control method: ON/OFF

Double-head



LM-LH-BD-1002

Voltage: DC24V/AC100~265V
Power : 3W*2/5-10W*2
LED Brand: Bridgelux/Osram/CREE/Philips
Color: 2200K/2700K/3000K
4000K/6000K
Beam angle: 24/36°
Size: Φ65*160mm/Φ90*160mm
Material: Aluminum + Tempered Glass
Waterproof rating: IP65
Control method: ON/OFF

Double-head



LM-LH-BD-1002

Voltage: DC24V/AC100~265V
Power : 9-15W*2W/15-18W*2
LED Brand: Bridgelux/Osram/CREE/Philips
Color: 2200K/2700K/3000K
4000K/6000K
Beam angle: 24/36°
Size: Φ108*300mm/Φ145*300mm
Material: Aluminum + Tempered Glass
Waterproof rating: IP65
Control method: ON/OFF

Double-head



LM-LH-BD-1002

Voltage: DC24V/AC100~265V
Power : 18-24W*2
LED Brand: Bridgelux/Osram/CREE/Philips
Color: 2200K/2700K/3000K
4000K/6000K
Beam angle: 24/36°
Size: Φ160*300mm
Material: Aluminum + Tempered Glass
Waterproof rating: IP65
Control method: ON/OFF

LM-LH-BD-2001

Voltage: DC24V/AC100~265V
 Power : 5*4W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 3/5/10/15/25/30/45/60°
 Size: 130*90mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF DMX512

LM-LH-BD-2001

Voltage: DC24V/AC100~265V
 Power : 6*4W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 3/5/10/15/25/30/45/60°
 Size: 150*105mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF DMX512

LM-LH-BD-2001

Voltage: DC24V/AC100~265V
 Power : 12*4W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 3/5/10/15/25/30/45/60°
 Size: 185*128mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF DMX512

LM-LH-BD-2001


Voltage: DC24V/AC100~265V
 Power : 8*2W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 10/15/25/30/45/60°
 Size: 130*90mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF DMX512

LM-LH-BD-2001

Voltage: DC24V/AC100~265V
 Power : 15*2W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 10/15/25/30/45/60°
 Size: 150*105mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF DMX512


LM-LH-BD-2001

Voltage: DC24V/AC100~265V
 Power : 24*2W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 10/15/25/30/45/60°
 Size: 185*128mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF DMX512




LM-LH-BD-2002

Voltage: DC24V/AC100~265V
Power : 9*2W
LED Brand: Bridgelux/Osram/CREE/Philips
Color: 2200K/2700K/3000K
4000K/6000K/RGB/RGBW
Beam angle: 10/15/25/30/45/60°
Size: 150*150mm
Material: Aluminum + Tempered Glass
Waterproof rating: IP65
Control method: ON/OFF DMX512




LM-LH-BD-2002

Voltage: DC24V/AC100~265V
Power : 16*2W
LED Brand: Bridgelux/Osram/CREE/Philips
Color: 2200K/2700K/3000K
4000K/6000K/RGB/RGBW
Beam angle: 10/15/25/30/45/60°
Size: 220*220mm
Material: Aluminum + Tempered Glass
Waterproof rating: IP65
Control method: ON/OFF DMX512





LM-LH-BD-2002

Voltage: DC24V/AC100~265V
Power : 16W
LED Brand: Bridgelux/Osram/CREE/Philips
Color: 2200K/2700K/3000K
4000K/6000K/RGB/RGBW
Beam angle: 10/15/25/30/45/60°
Size: 150*150mm
Material: Aluminum + Tempered Glass
Waterproof rating: IP65
Control method: ON/OFF DMX512





LM-LH-BD-2002

Voltage: DC24V/AC100~265V
Power : 36W
LED Brand: Bridgelux/Osram/CREE/Philips
Color: 2200K/2700K/3000K
4000K/6000K/RGB/RGBW
Beam angle: 10/15/25/30/45/60°
Size: 220*220mm
Material: Aluminum + Tempered Glass
Waterproof rating: IP65
Control method: ON/OFF DMX512



LM-LH-BD-2002

Voltage: DC24V/AC100~265V
Power : 20W
LED Brand: Bridgelux/Osram/CREE/Philips
Color: 2200K/2700K/3000K
4000K/6000K
Beam angle: 15°
Size: 120*120mm
Material: Aluminum + Tempered Glass
Waterproof rating: IP65
Control method: ON/OFF



LM-LH-BD-2002

Voltage: DC24V/AC100~265V
Power : 30W
LED Brand: Bridgelux/Osram/CREE/Philips
Color: 2200K/2700K/3000K
4000K/6000K
Beam angle: 15°
Size: 150*150mm
Material: Aluminum + Tempered Glass
Waterproof rating: IP65
Control method: ON/OFF

LM-LH-BD-2002

Voltage: DC24V/AC100~265V
 Power :40W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K
 Beam angle: 15°
 Size: 180*180mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF

LM-LH-BD-2002

Voltage: DC24V/AC100~265V
 Power : 50W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K
 Beam angle: 15°
 Size: 220*220mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF

LM-LH-BD-2002

Voltage: DC24V/AC100~265V
 Power : 60W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K
 Beam angle: 15°
 Size: 220*220mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF

LM-LH-BD-2003


Voltage: DC24V/AC100~265V
 Power :18*1.5W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 10/15/25/30/45/60°
 Size: 160*160mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF DMX512

LM-LH-BD-2003

Voltage: DC24V/AC100~265V
 Power : 24*1.5W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 10/15/25/30/45/60°
 Size: 190*160mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF DMX512


LM-LH-BD-2003

Voltage: DC24V/AC100~265V
 Power : 36*1.5W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 10/15/25/30/45/60°
 Size: 200*200mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF DMX512

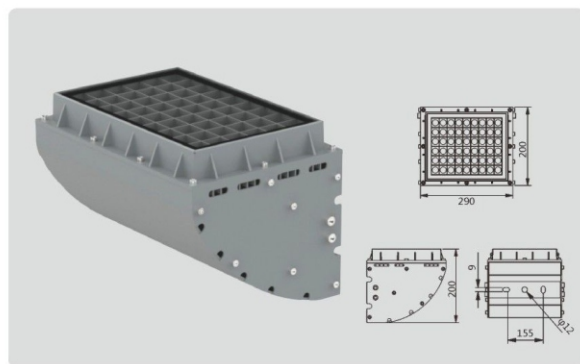


LM-LH-BD-2003

Voltage: DC24V/AC100~265V
 Power : 54*1.5W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 10/15/25/30/45/60°
 Size: 290*200mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF DMX512

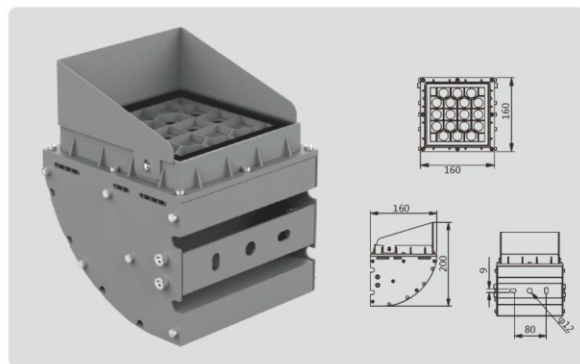


LM-LH-BD-2003

Voltage: DC24V/AC100~265V
 Power : 18*1.5W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 10/15/25/30/45/60°
 Size: 160*160mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF DMX512

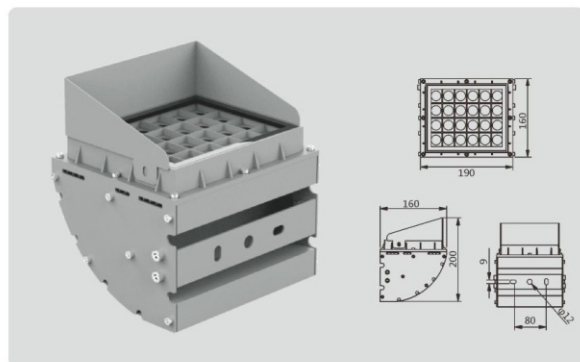


LM-LH-BD-2003

Voltage: DC24V/AC100~265V
 Power : 24*1.5W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 10/15/25/30/45/60°
 Size: 190*160mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF DMX512

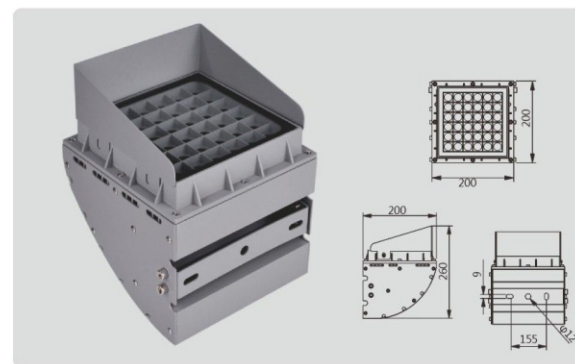


LM-LH-BD-2003

Voltage: DC24V/AC100~265V
 Power : 36*1.5W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 10/15/25/30/45/60°
 Size: 200*200mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF DMX512

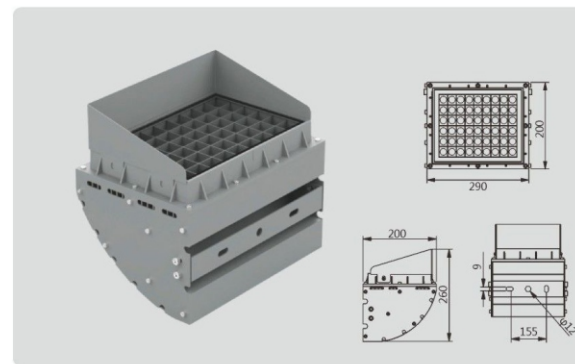

LM-LH-BD-2003

Voltage: DC24V/AC100~265V
 Power : 54*1.5W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 10/15/25/30/45/60°
 Size: 290*200mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF DMX512

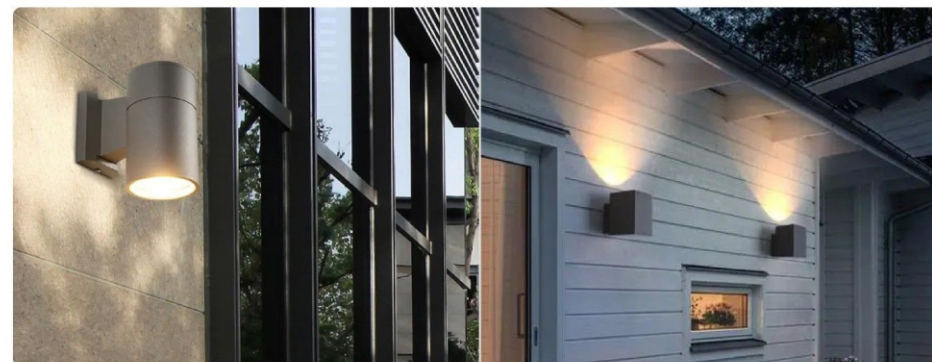

LM-LH-BD-2004

Voltage: DC24V/AC100~265V
 Power :12W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K
 Beam angle: 15/24/36°
 Size: 95*95mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF

LM-LH-BD-2004

Voltage: DC24V/AC100~265V
 Power : 20W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K
 Beam angle: 15/24/36°
 Size: 125*125mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF

LM-LH-BD-2004

Voltage: DC24V/AC100~265V
 Power : 30W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K
 Beam angle: 15/24/36°
 Size: 145*145mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF

LM-LH-BD-2004

Voltage: DC24V/AC100~265V
 Power :9*1.5W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 10/15/25/30/45/60°
 Size: 95*95mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF DMX512

LM-LH-BD-2004

Voltage: DC24V/AC100~265V
 Power :16W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 10/15/25/30/45/60°
 Size: 125*125mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF DMX512

LM-LH-BD-2004

Voltage: DC24V/AC100~265V
 Power : 25W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 10/15/25/30/45/60°
 Size: 145*145mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF DMX512

LM-LH-BD-3001

Voltage: DC24V/AC100~265V
 Power : 6*2W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 10/15/25/30/45/60°
 Size: $\Phi 100 \times 215 \times 100$ mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF DMX512

LM-LH-BD-3001

Voltage: DC24V/AC100~265V
 Power : 12W/9*1.5W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 10/15/25/30/45/60°
 Size: $\Phi 100 \times 270 \times 130$ mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF DMX512

LM-LH-BD-3001

Voltage: DC24V/AC100~265V
 Power : 3*2W/3*3W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 10/15/25/30/45/60°
 Size: $\Phi 100 \times 245 \times 100$ mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF DMX512

LM-LH-BD-3001

Voltage: DC24V/AC100~265V
 Power : 6*2W/9*2W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 10/15/25/30/45/60°
 Size: $\Phi 135 \times 310 \times 135$ mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF DMX512

LM-LH-BD-3001

Voltage: DC24V/AC100~265V
 Power : 6*2W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 10/15/25/30/45/60°
 Size: $100 \times 215 \times 100$ mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF DMX512

LM-LH-BD-3001

Voltage: DC24V/AC100~265V
 Power : 6*2W
 LED Brand: Bridgelux/Osram/CREE/Philips
 Color: 2200K/2700K/3000K
 4000K/6000K/RGB/RGBW
 Beam angle: 10/15/25/30/45/60°
 Size: $130 \times 255 \times 130$ mm
 Material: Aluminum + Tempered Glass
 Waterproof rating: IP65
 Control method: ON/OFF DMX512

LM-LH-BD-3001

Voltage: DC24V/AC100~265V

Power :18*12*2W

LED Brand: Bridgelux/Osram/CREE/Philips

Color: 2200K/2700K/3000K
4000K/6000K/RGB/RGBW

Beam angle: 10/15/25/30/45/60°

Size: 105*245*100mm

Material: Aluminum + Tempered Glass

Waterproof rating: IP65

Control method: ON/OFF DMX512

LM-LH-BD-3001

Voltage: DC24V/AC100~265V

Power :18*12*2W

LED Brand: Bridgelux/Osram/CREE/Philips

Color: 2200K/2700K/3000K
4000K/6000K/RGB/RGBW

Beam angle: 10/15/25/30/45/60°

Size: 130*295*130mm

Material: Aluminum + Tempered Glass

Waterproof rating: IP65

Control method: ON/OFF DMX512

