


LED WALL WASHER



Product Features

- Fully sealed, waterproof design utilizing silicone sealing materials.
- Ensures an ingress protection rating of IP65 or higher.
- High luminous efficacy and high color rendering index (CRI).
- High-transmittance PMMA optical lens with a beam uniformity greater than 0.92.



35*32

WW1 - Series LED Wall Washer

Voltage: DC24V
Power: 18W/24W/36W
LED Brand: Bridgelux/Osram/CREE/Philips
LED Power: 1-5W
Color: 2200K/2700K/3000K
4000K/6000K/RGB/RGBW
CRI: RA80
Beam angle: 10°60°
Size: 1000*35*32mm
Material: Aluminum + Tempered Glass
Light-transmitting material: Tempered Glass
Waterproof rating: IP65
Cable method: Waterproof male and female connectors
Control method: ON/OFF DMX512
Installation: Securing the movable bracket



35*32

WW1 - Series LED Wall Washer

Voltage: DC24V
Power: 18W/24W/36W
LED Brand: Bridgelux/Osram/CREE/Philips
LED Power: 1-5W
Color: 2200K/2700K/3000K
4000K/6000K/RGB/RGBW
CRI: RA80
Beam angle: 10°60°
Size: 1000*35*32mm
Material: Aluminum + Tempered Glass
Light-transmitting material: Tempered Glass
Waterproof rating: IP65
Cable method: Waterproof male and female connectors
Control method: ON/OFF DMX512
Installation: Securing the movable bracket



35*32

WW1 - Series LED Wall Washer

Voltage: DC24V
Power: 18W/24W/36W
LED Brand: Bridgelux/Osram/CREE/Philips
LED Power: 1-5W
Color: 2200K/2700K/3000K
4000K/6000K/RGB/RGBW
CRI: RA80
Beam angle: 10°60°
Size: 1000*35*32mm
Material: Aluminum + Tempered Glass
Light-transmitting material: Tempered Glass
Waterproof rating: IP65
Cable method: Waterproof male and female connectors
Control method: ON/OFF DMX512
Installation: Securing the movable bracket



40*35

WW1 - Series LED Wall Washer

Voltage: DC24V
Power: 24W/36W
LED Brand: Bridgelux/Osram/CREE/Philips
LED Power: 1-5W
Color: 2200K/2700K/3000K
4000K/6000K/RGB/RGBW
CRI: RA80
Beam angle: 10°60°
Size: 1000*40*35mm
Material: Aluminum + Tempered Glass
Light-transmitting material: Tempered Glass
Waterproof rating: IP65
Cable method: Waterproof male and female connectors
Control method: ON/OFF DMX512
Installation: Securing the movable bracket



34*24



WW1 - Series LED Wall Washer

Voltage: DC24V
Power: 18W/24W
LED Brand: Bridgelux/Osram/CREE/Philips
LED Power: 1-5W
Color: 2200K/2700K/3000K
4000K/6000K/RGB/RGBW
CRI: RA80
Beam angle: 10°60°
Size: 1000*34*24mm
Material: Aluminum + Tempered Glass
Light-transmitting material: Tempered Glass
Waterproof rating: IP65
Cable method: Waterproof male and female connectors
Control method: ON/OFF DMX512
Installation: Securing the movable bracket

40*25



WW1 - Series LED Wall Washer

Voltage: DC24V
Power: 24W/36W
LED Brand: Bridgelux/Osram/CREE/Philips
LED Power: 1-5W
Color: 2200K/2700K/3000K
4000K/6000K/RGB/RGBW
CRI: RA80
Beam angle: 10°60°
Size: 1000*40*25mm
Material: Aluminum + Tempered Glass
Light-transmitting material: Tempered Glass
Waterproof rating: IP65
Cable method: Waterproof male and female connectors
Control method: ON/OFF DMX512
Installation: Securing the movable bracket

40*25



WW1 - Series LED Wall Washer

Voltage: DC24V
Power: 24W/36W
LED Brand: Bridgelux/Osram/CREE/Philips
LED Power: 1-5W
Color: 2200K/2700K/3000K
4000K/6000K/RGB/RGBW
CRI: RA80
Beam angle: 10°60°
Size: 1000*40*25mm
Material: Aluminum + Tempered Glass
Light-transmitting material: Tempered Glass
Waterproof rating: IP65
Cable method: Waterproof male and female connectors
Control method: ON/OFF DMX512
Installation: Securing the movable bracket

60*35




WW1 - Series LED Wall Washer

Voltage: DC24V
Power: 48W/72W
LED Brand: Bridgelux/Osram/CREE/Philips
LED Power: 1-5W
Color: 2200K/2700K/3000K
4000K/6000K/RGB/RGBW
CRI: RA80
Beam angle: 10°60°
Size: 1000*60*35mm
Material: Aluminum + Tempered Glass
Light-transmitting material: Tempered Glass
Waterproof rating: IP65
Cable method: Waterproof male and female connectors
Control method: ON/OFF DMX512
Installation: Securing the movable bracket

39*25

WW1 - Series LED Wall Washer


Voltage: DC24V
Power: 18W/24W
LED Brand: Bridgelux/Osram/CREE/Philips
LED Power: 1-5W
Color: 2200K/2700K/3000K
4000K/6000K/RGB/RGBW
CRI: RA80
Beam angle: 10°60°
Size: 1000*39*25mm
Material: Aluminum + Tempered Glass
Light-transmitting material: Tempered Glass
Waterproof rating: IP65
Cable method: Waterproof male and female connectors
Control method: ON/OFF DMX512
Installation: Securing the movable bracket

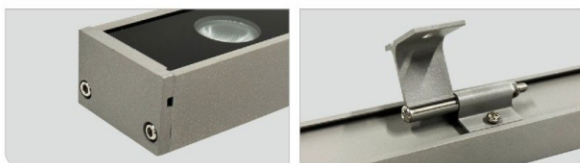

39*21

WW1 - Series LED Wall Washer

Voltage: DC24V
Power: 18W/24W
LED Brand: Bridgelux/Osram/CREE/Philips
LED Power: 1-5W
Color: 2200K/2700K/3000K
4000K/6000K/RGB/RGBW
CRI: RA80
Beam angle: 10°60°
Size: 1000*39*21mm
Material: Aluminum + Tempered Glass
Light-transmitting material: Tempered Glass
Waterproof rating: IP65
Cable method: Waterproof male and female connectors
Control method: ON/OFF DMX512
Installation: Securing the movable bracket

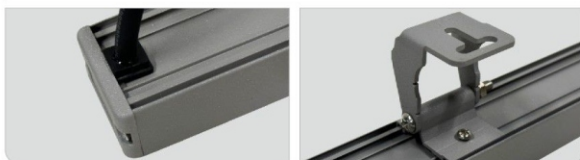

42*28

WW1 - Series LED Wall Washer

Voltage: DC24V
Power: 18W/24W/36W
LED Brand: Bridgelux/Osram/CREE/Philips
LED Power: 1-5W
Color: 2200K/2700K/3000K
4000K/6000K/RGB/RGBW
CRI: RA80
Beam angle: 10°60°
Size: 1000*42*28mm
Material: Aluminum + Tempered Glass
Light-transmitting material: Tempered Glass
Waterproof rating: IP65
Cable method: Waterproof male and female connectors
Control method: ON/OFF DMX512
Installation: Securing the movable bracket



40*28

WW1 - Series LED Wall Washer

Voltage: DC24V
Power: 18W/24W
LED Brand: Bridgelux/Osram/CREE/Philips
LED Power: 1-5W
Color: 2200K/2700K/3000K
4000K/6000K/RGB/RGBW
CRI: RA80
Beam angle: 10°60°
Size: 1000*40*28mm
Material: Aluminum + Tempered Glass
Light-transmitting material: Tempered Glass
Waterproof rating: IP65
Cable method: Waterproof male and female connectors
Control method: ON/OFF DMX512
Installation: Securing the movable bracket



40*33

WW1 - Series LED Wall Washer

Voltage: DC24V
Power: 18W/24W/36W
LED Brand: Bridgelux/Osram/CREE/Philips
LED Power: 1-5W
Color: 2200K/2700K/3000K
4000K/6000K/RGB/RGBW
CRI: RA80
Beam angle: 10°60°
Size: 1000*40*33mm
Material: Aluminum + Tempered Glass
Light-transmitting material: Tempered Glass
Waterproof rating: IP65
Cable method: Waterproof male and female connectors
Control method: ON/OFF DMX512
Installation: Securing the movable bracket



36*24

WW2 - Series LED Wall Washer

Voltage: DC24V
Power: 18W/24W
LED Brand: Bridgelux/Osram/CREE/Philips
LED Power: 1-5W
Color: 2200K/2700K/3000K
4000K/6000K/RGB/RGBW
CRI: RA80
Beam angle: 10°60°
Size: 1000*36*24mm
Material: Aluminum + Tempered Glass
Light-transmitting material: Tempered Glass
Waterproof rating: IP65
Cable method: Waterproof male and female connectors
Control method: ON/OFF DMX512
Installation: Securing the movable bracket



40*26

WW2 - Series LED Wall Washer

Voltage: DC24V
Power: 24W/36W
LED Brand: Bridgelux/Osram/CREE/Philips
LED Power: 1-5W
Color: 2200K/2700K/3000K
4000K/6000K/RGB/RGBW
CRI: RA80
Beam angle: 10°60°
Size: 1000*40*26mm
Material: Aluminum + Tempered Glass
Light-transmitting material: Tempered Glass
Waterproof rating: IP65
Cable method: Waterproof male and female connectors
Control method: ON/OFF DMX512
Installation: Securing the movable bracket



40*26

WW2 - Series LED Wall Washer

Voltage: DC24V
Power: 24W/36W
LED Brand: Bridgelux/Osram/CREE/Philips
LED Power: 1-5W
Color: 2200K/2700K/3000K
4000K/6000K/RGB/RGBW
CRI: RA80
Beam angle: 10°60°
Size: 1000*40*26mm
Material: Aluminum + Tempered Glass
Light-transmitting material: Tempered Glass
Waterproof rating: IP65
Cable method: Waterproof male and female connectors
Control method: ON/OFF DMX512
Installation: Securing the movable bracket



65*40

WW2 - Series LED Wall Washer

Voltage: DC24V
Power: 48W/72W
LED Brand: Bridgelux/Osram/CREE/Philips
LED Power: 1-5W
Color: 2200K/2700K/3000K
4000K/6000K/RGB/RGBW
CRI: RA80
Beam angle: 10°60°
Size: 1000*65*40mm
Material: Aluminum + Tempered Glass
Light-transmitting material: Tempered Glass
Waterproof rating: IP65
Cable method: Waterproof male and female connectors
Control method: ON/OFF DMX512
Installation: Securing the movable bracket



36*25

WW2 - Series LED Wall Washer

Voltage: DC24V
Power: 18W/24W
LED Brand: Bridgelux/Osram/CREE/Philips
LED Power: 1-5W
Color: 2200K/2700K/3000K
4000K/6000K/RGB/RGBW
CRI: RA80
Beam angle: 10°60°
Size: 1000*36*25mm
Material: Aluminum + Tempered Glass
Light-transmitting material: Tempered Glass
Waterproof rating: IP65
Cable method: Waterproof male and female connectors
Control method: ON/OFF DMX512
Installation: Securing the movable bracket



36*25

WW2 - Series LED Wall Washer

Voltage: DC24V
Power: 18W/24W
LED Brand: Bridgelux/Osram/CREE/Philips
LED Power: 1-5W
Color: 2200K/2700K/3000K
4000K/6000K/RGB/RGBW
CRI: RA80
Beam angle: 10°60°
Size: 1000*36*25mm
Material: Aluminum + Tempered Glass
Light-transmitting material: Tempered Glass
Waterproof rating: IP65
Cable method: Waterproof male and female connectors
Control method: ON/OFF DMX512
Installation: Securing the movable bracket



36*25

WW2 - Series LED Wall Washer


Voltage: DC24V
Power: 18W/24W
LED Brand: Bridgelux/Osram/CREE/Philips
LED Power: 1-5W
Color: 2200K/2700K/3000K
4000K/6000K/RGB/RGBW
CRI: RA80
Beam angle: 10°/60°
Size: 1000*36*25mm
Material: Aluminum + Tempered Glass
Light-transmitting material: Tempered Glass
Waterproof rating: IP65
Cable method: Waterproof male and female connectors
Control method: ON/OFF DMX512
Installation: Securing the movable bracket



35*25

WW2 - Series LED Wall Washer


Voltage: DC24V
Power: 24W
LED Brand: Bridgelux/Osram/CREE/Philips
LED Power: 1-5W
Color: 2200K/2700K/3000K
4000K/6000K/RGB/RGBW
CRI: RA80
Beam angle: 10°/60°
Size: 1000*35*25mm
Material: Aluminum + Tempered Glass
Light-transmitting material: Tempered Glass
Waterproof rating: IP65
Cable method: Waterproof male and female connectors
Control method: ON/OFF DMX512
Installation: Securing the movable bracket

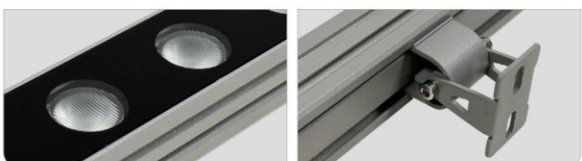

38*25

WW2 - Series LED Wall Washer


Voltage: DC24V
Power: 18W/24W/36W
LED Brand: Bridgelux/Osram/CREE/Philips
LED Power: 1-5W
Color: 2200K/2700K/3000K
4000K/6000K/RGB/RGBW
CRI: RA80
Beam angle: 10°/60°
Size: 1000*38*25mm
Material: Aluminum + Tempered Glass
Light-transmitting material: Tempered Glass
Waterproof rating: IP65
Cable method: Waterproof male and female connectors
Control method: ON/OFF DMX512
Installation: Securing the movable bracket

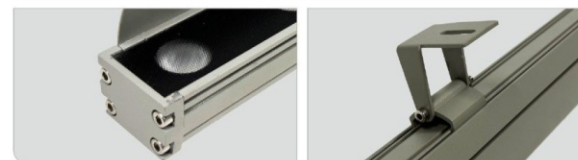

38*25

WW2 - Series LED Wall Washer


Voltage: DC24V
Power: 18W/24W/36W
LED Brand: Bridgelux/Osram/CREE/Philips
LED Power: 1-5W
Color: 2200K/2700K/3000K
4000K/6000K/RGB/RGBW
CRI: RA80
Beam angle: 10°/60°
Size: 1000*38*25mm
Material: Aluminum + Tempered Glass
Light-transmitting material: Tempered Glass
Waterproof rating: IP65
Cable method: Waterproof male and female connectors
Control method: ON/OFF DMX512
Installation: Securing the movable bracket

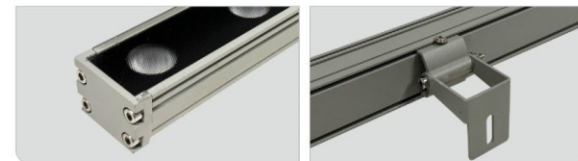

38*25

WW2 - Series LED Wall Washer

Voltage: DC24V
Power: 18W/24W/38W
LED Brand: Bridgelux/Osram/CREE/Philips
LED Power: 1-5W
Color: 2200K/2700K/3000K
4000K/6000K/RGB/RGBW
CRI: RA80
Beam angle: 10°60°
Size: 1000*38*25mm
Material: Aluminum + Tempered Glass
Light-transmitting material: Tempered Glass
Waterproof rating: IP65
Cable method: Waterproof male and female connectors
Control method: ON/OFF DMX512
Installation: Securing the movable bracket

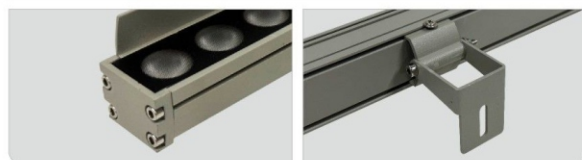

48*33

WW2 - Series LED Wall Washer

Voltage: DC24V
Power: 24W/36W/48W
LED Brand: Bridgelux/Osram/CREE/Philips
LED Power: 1-5W
Color: 2200K/2700K/3000K
4000K/6000K/RGB/RGBW
CRI: RA80
Beam angle: 10°60°
Size: 1000*48*33mm
Material: Aluminum + Tempered Glass
Light-transmitting material: Tempered Glass
Waterproof rating: IP65
Cable method: Waterproof male and female connectors
Control method: ON/OFF DMX512
Installation: Securing the movable bracket



48*33

WW2 - Series LED Wall Washer

Voltage: DC24V
Power: 24W/36W/48W
LED Brand: Bridgelux/Osram/CREE/Philips
LED Power: 1-5W
Color: 2200K/2700K/3000K
4000K/6000K/RGB/RGBW
CRI: RA80
Beam angle: 10°60°
Size: 1000*48*33mm
Material: Aluminum + Tempered Glass
Light-transmitting material: Tempered Glass
Waterproof rating: IP65
Cable method: Waterproof male and female connectors
Control method: ON/OFF DMX512
Installation: Securing the movable bracket



48*33

WW2 - Series LED Wall Washer

Voltage: DC24V
Power: 24W/36W/48W
LED Brand: Bridgelux/Osram/CREE/Philips
LED Power: 1-5W
Color: 2200K/2700K/3000K
4000K/6000K/RGB/RGBW
CRI: RA80
Beam angle: 10°60°
Size: 1000*48*33mm
Material: Aluminum + Tempered Glass
Light-transmitting material: Tempered Glass
Waterproof rating: IP65
Cable method: Waterproof male and female connectors
Control method: ON/OFF DMX512
Installation: Securing the movable bracket



35*57

WW2 - Series LED Wall Washer

Voltage: DC24V
Power: 18W/24W/36W
LED Brand: Bridgelux/Osram/CREE/Philips
LED Power: 1-5W
Color: 2200K/2700K/3000K
4000K/6000K/RGB/RGBW
CRI: RA80
Beam angle: 10°60°
Size: 1000*35*57mm
Material: Aluminum + Tempered Glass
Light-transmitting material: Tempered Glass
Waterproof rating: IP65
Cable method: Waterproof male and female connectors
Control method: ON/OFF DMX512
Installation: Securing the movable bracket



28*35

Perforated Metal Sheet LED Linear Light

Voltage: DC24V
Power: 12W
LED Brand: Osram/CREE/Philips/Epistar/Sanan
LED Power: 48pcs*0.25W
Color: 2200K/2700K/3000K
4000K/6000K/RGB/RGBW
CRI: RA80
Beam angle: 10°60°
Size: 1000*28*35mm
Material: Aluminum + PC lens
Light-transmitting material: PC lens
Waterproof rating: IP65
Cable method: Waterproof male and female connectors
Control method: ON/OFF DMX512
Installation: U-bracket mounting



28*20

Perforated Metal Sheet LED Linear Light

Voltage: DC24V
Power: 12W
LED Brand: Osram/CREE/Philips/Epistar/Sanan
LED Power: 48pcs*0.25W
Color: 2200K/2700K/3000K
4000K/6000K/RGB/RGBW
CRI: RA80
Beam angle: 120°
Size: 1000*28*20mm
Material: Aluminum + PC lens
Light-transmitting material: PC lens
Waterproof rating: IP65
Cable method: Waterproof male and female connectors
Control method: ON/OFF DMX512
Installation: Securing the movable bracket



22*18



Perforated Metal Sheet LED Linear Light

Voltage: DC24V
Power: 12W
LED Brand: Osram/CREE/Philips/Epistar/Sanan
LED Power: 48pcs*0.25W
Color: 2200K/2700K/3000K
4000K/6000K/RGB/RGBW
CRI: RA80
Beam angle: 10°60°
Size: 1000*22*18mm
Material: Aluminum + PC lens
Light-transmitting material: PC lens
Waterproof rating: IP65
Cable method: Waterproof male and female connectors
Control method: ON/OFF DMX512
Installation: Securing the movable bracket



22*18



Perforated Metal Sheet LED Linear Light

Voltage: DC24V
Power: 12W
LED Brand: Osram/CREE/Philips/Epistar/Sanan
LED Power: 48pcs*0.25W
Color: 2200K/2700K/3000K
4000K/6000K/RGB/RGBW
CRI: RA80
Beam angle: 10°60°
Size: 1000*22*18mm
Material: Aluminum + PC lens
Light-transmitting material: PC lens
Waterproof rating: IP65
Cable method: Waterproof male and female connectors
Control method: ON/OFF DMX512
Installation: Securing the movable bracket



28*35



Glass Series LED Linear Light

Voltage: DC24V
Power: 12W
LED Brand: Osram/CREE/Philips/Epistar/Sanan
LED Power: 48pcs*0.25W
Color: 2200K/2700K/3000K
4000K/6000K/RGB/RGBW
CRI: RA80
Beam angle: 120°
Size: 1000*28*35mm
Material: Aluminum + Tempered glass
Light-transmitting material: PC lens
Waterproof rating: IP65
Cable method: Waterproof male and female connectors
Control method: ON/OFF DMX512
Installation: Securing the movable bracket



30*32



Glass Series LED Linear Light


Voltage: DC24V
Power: 12W
LED Brand: Osram/CREE/Philips/Epistar/Sanan
LED Power: 48pcs*0.25W
Color: 2200K/2700K/3000K
4000K/6000K/RGB/RGBW
CRI: RA80
Beam angle: 10°60°
Size: 1000*30*32mm
Material: Aluminum + Tempered glass
Light-transmitting material: PC lens
Waterproof rating: IP65
Cable method: Waterproof male and female connectors
Control method: ON/OFF DMX512
Installation: Securing the movable bracket



30*32

Glass Series LED Linear Light


Voltage: DC24V
Power: 12W
LED Brand: Osram/CREE/Philips/Epistar/Sanan
LED Power: 48pcs*0.25W
Color: 2200K/2700K/3000K
4000K/6000K/RGB/RGBW
CRI: RA80
Beam angle: 10°60°
Size: 1000*30*32mm
Material: Aluminum + tempered glass
Light-transmitting material: PC lens
Waterproof rating: IP65
Cable method: Waterproof male and female connectors
Control method: ON/OFF DMX512
Installation: Securing the movable bracket

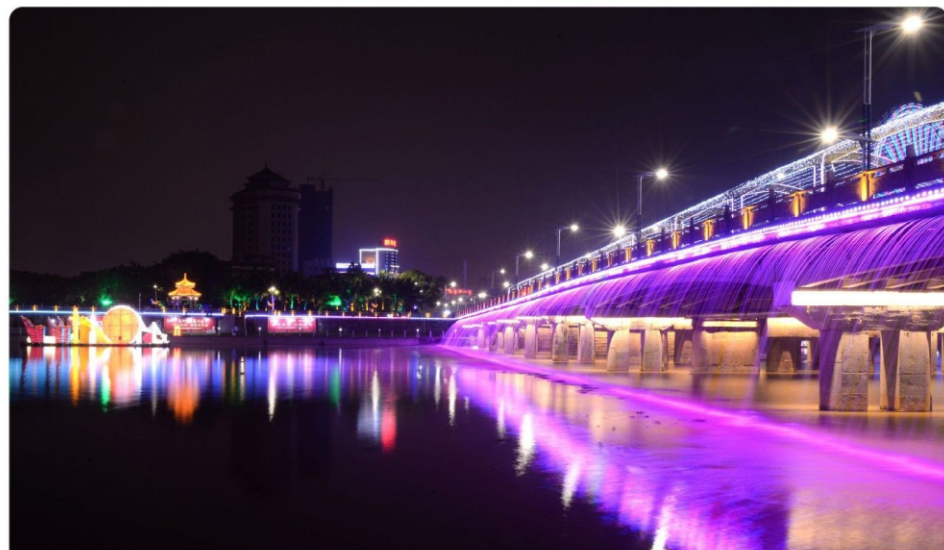

30*48

PC Series LED Linear Light

Voltage: DC24V
Power: 12W
LED Brand: Osram/CREE/Philips/Epistar/Sanan
LED Power: 48pcs*0.25W
Color: 2200K/2700K/3000K
4000K/6000K/RGB/RGBW
CRI: RA80
Beam angle: 120°
Size: 1000*30*48mm
Material: Aluminum + PC
Light-transmitting material: PC
Waterproof rating: IP65
Cable method: Waterproof male and female connectors
Control method: ON/OFF DMX512
Installation: Snap-fit mounting



30*42

PC Series LED Linear Light


Voltage: DC24V
Power: 12W
LED Brand: Osram/Epistar/Sanan
LED : 2835/5050
Color: 2200K/2700K/3000K
CRI: RA80
Beam angle: 120°
Size: 1000*30*42mm
Material: Aluminum + PC
Light-transmitting material: PC
Waterproof rating: IP65
Cable method: 2 x 0.75 mm² rubber cable
Waterproof male and female connectors
Control method: ON/OFF DMX512
Installation: Snap-fit mounting



30*48

PC Series LED Linear Light


Voltage: DC24V
Power: 12W
LED Brand: Osram/Epistar/Sanan
LED : 2835/5050
Color: 2200K/3000K/6000K
CRI: RA80
Beam angle: 120°
Size: 1000*30*48mm
Material: Aluminum + PC
Light-transmitting material: PC
Waterproof rating: IP65
Cable method: 2 x 0.75 mm² rubber cable
Waterproof male and female connectors
Control method: ON/OFF DMX512
Installation: Snap-fit mounting



30*45

PC Series LED Linear Light

Voltage: DC24V
Power: 12W
LED Brand: Osram/Epistar/Sanan
LED : 2835/5050
Color: 2200K/3000K/6000K
CRI: RA80
Beam angle: 120°
Size: 1000*30*45mm
Material: Aluminum + PC
Light-transmitting material: PC
Waterproof rating: IP65
Cable method: 2 x 0.75 mm² rubber cable
Waterproof male and female connectors
Control method: ON/OFF DMX512
Installation: Snap-fit mounting



30*40

Acrylic Series LED Linear Light

Voltage: DC24V
Power: 12W
LED Brand: Osram/CREE/Philips/Epistar/Sanan
LED Power: 48pcs*0.25W
Color: 2200K/2700K/3000K
4000K/6000K/RGB/RGBW
CRI: RA80
Beam angle: 120°
Size: 1000*30*40mm
Material: Aluminum + Acrylic
Light-transmitting material: Acrylic
Waterproof rating: IP65
Cable method: Waterproof male and female connectors
Control method: ON/OFF DMX512
Installation: Snap-fit mounting



24*38

Acrylic Series LED Linear Light

Voltage: DC24V
Power: 12W
LED Brand: Osram/CREE/Philips/Epistar/Sanan
LED Power: 48pcs*0.25W
Color: 2200K/2700K/3000K
4000K/6000K/RGB/RGBW
CRI: RA80
Beam angle: 120°
Size: 1000*24*38mm
Material: Aluminum + Acrylic
Light-transmitting material: Acrylic
Waterproof rating: IP65
Cable method: Waterproof male and female connectors
Control method: ON/OFF DMX512
Installation: Snap-fit mounting



66*24

Patent Series LED Linear Light

Voltage: DC24V
Power: 12W
LED Brand: Osram/CREE/Philips/Epistar/Sanan
LED Power: 48pcs*0.25W
Color: 2200K/2700K/3000K
4000K/6000K/RGB/RGBW
CRI: RA80
Beam angle: 120°
Size: 1000*66*24mm
Material: Aluminum + Tempered Glass
Light-transmitting material: Tempered Glass
Waterproof rating: IP65
Cable method: Waterproof male and female connectors
Control method: ON/OFF DMX512
Installation: Slot mounting



64*35

Patent Series LED Linear Light



Voltage: DC24V
Power: 12W
LED Brand: Osram/CREE/Philips/Epistar/Sanan
LED Power: 48pcs*0.25W
Color: 2200K/2700K/3000K
4000K/6000K/RGB/RGBW
CRI: RA80
Beam angle: 120°
Size: 1000*64*35mm
Material: Aluminum + Tempered Glass
Light-transmitting material: Tempered Glass
Waterproof rating: IP65
Cable method: Waterproof male and female connectors
Control method: ON/OFF DMX512
Installation: Slot mounting



66*24

Patent Series LED Linear Light

Voltage: DC24V
Power: 12W
LED Brand: Osram/CREE/Philips/Epistar/Sanan
LED Power: 48pcs*0.25W
Color: 2200K/2700K/3000K
4000K/6000K/RGB/RGBW
CRI: RA80
Beam angle: 120°
Size: 1000*66*24mm
Material: Aluminum + Tempered Glass
Light-transmitting material: Tempered Glass
Waterproof rating: IP65
Cable method: Waterproof male and female connectors
Control method: ON/OFF DMX512
Installation: Slot mounting



50*50

Patent Series LED Linear Light

Voltage: DC24V
Power: 12W
LED Brand: Osram/CREE/Philips/Epistar/Sanan
LED Power: 48pcs*0.25W
Color: 2200K/2700K/3000K
4000K/6000K/RGB/RGBW
CRI: RA80
Beam angle: 120°
Size: 1000*50*50mm
Material: Aluminum + Perforated Metal Sheet
Light-transmitting material: PC lens
Waterproof rating: IP65
Cable method: Waterproof male and female connectors
Control method: ON/OFF DMX512
Installation: Slot mounting

